

Inverter Multi Split System

Complete climate control
when space is at a premium



brivis

The perfect multi room solution



Economical Solutions

When your home requires heating or cooling in more than one room and ducting is impractical, or independent room control is needed, the Brivis Inverter Multi Split System is the simplest way to heat or cool up to five individual rooms with only one outdoor unit.

Traditionally, five rooms would require five indoor units and five outdoor units. This does not allow for the most efficient use of your outdoor space, and can create quite an obtrusive appearance to your home. Brivis Inverter Multi Split Systems solves this problem and provides individual control of the air conditioning in each room. This optimises comfort and saves on running costs by either only heating or cooling individual rooms as required.

The Brivis Inverter Multi Split Systems have a choice of two indoor unit types in any combination. Brivis have Hi-Wall and Slim Ducted units in 5 different models ranging from 2.0kW to 7.0kW. There are 5 Outdoor units with capacities ranging from 5.2kW up to 13.6kW, so Brivis has a system configuration and capacity to suit your unique requirement.

Summer Cool and Winter Warm

During operation, a sophisticated control system constantly monitors the system parameters to maintain your desired climate setting. 3D DC synchronisation ensures a fast and controlled warm-up and cool-down of your spaces.

Key Features

- Heating or cooling up to 5 separate rooms
- For homes with limited space for ducting
- The ability to turn individual rooms On or Off as required
- Individual control of room temperature


Comfort without compromise

With the latest in technology, the Brivis Inverter Multi Split System quietly maintains steady, stable comfort conditions with quiet, efficient performance. Turbo mode, with its rapid cool down or warm up, helps achieve the desired room temperature in the shortest possible time.



*Hi-Wall indoor unit only

Multi-Split

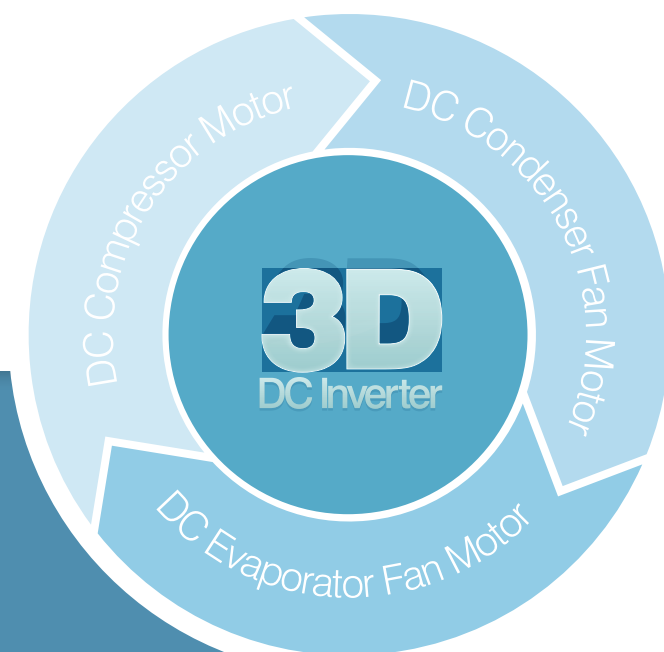

Feature packed Hi-Wall unit

The stylish Hi-Wall indoor units also have vertical and horizontal swing louvre functions, which assist in achieving a perfectly distributed, comfortable temperature throughout the room.

The Brivis Inverter Multi Hi-Wall has the perfect balance of pleasing aesthetics and practical functionality. All models have an LED display, sleep mode and auto-restart. A discreet easy to read wireless remote control sits neatly in a magnetic wall mount.



Out of sight

Compact and space saving in design, the Brivis Inverter Multi Slim Ducted indoor unit is ideal for tight spaces. Hidden away in a bulkhead or a ceiling cavity, with excellent acoustic characteristics, this ultra slim unit also has flexible installation configuration options. It might be compact in size, but still has the power needed to direct beautifully conditioned air throughout the room, and is controlled via a wired wall control.

Smart 3D DC Inverter

A faster, more controlled warm-up or cool-down is achieved by the advanced inverter control systems. It combines three Direct Current (DC) motor technologies working in perfect unison to provide you with:

- Higher efficiency
- Synchronised performance
- Lower running costs

5 Year Warranty

A comprehensive 5 year parts and labour warranty provides you with total peace of mind. Fully supported by our national service capability.




Multi-Split



Hi-Wall

INDOOR UNIT - HI-WALL		MINHW020	MINHW026	MINHW035	MINHW052	MINHW070	
Power supply	V-Ph-Hz	220~240-1-50					
COOLING Rated Capacity (Range)	kW	2.0 (1.71 ~ 3.71)	2.6 (1.90 ~ 4.04)	3.5 (2.21 ~ 4.71)	5.2 (3.03 ~ 6.46)	7.0 (4.25 ~ 9.06)	
HEATING Rated Capacity (Range)		2.3 (1.78 ~ 3.79)	2.9 (1.97 ~ 4.20)	3.8 (2.25 ~ 4.80)	5.5 (3.13 ~ 6.68)	7.5 (3.93 ~ 8.38)	
Power Input	W	24	24	24	60	72	
Rated Current	A	0.11	0.11	0.11	0.27	0.33	
Airflow (Hi / Med / Lo)	L/s	147 / 128 / 97	147 / 128 / 97	175 / 150 / 120	278 / 222 / 195	389 / 361 / 292	
Sound Pressure (Hi / Med / Lo) @1m	dB(A)	41 / 35 / 25	41 / 35 / 25	45 / 40 / 32	46 / 39 / 32	52 / 48 / 38	
Dimensions	Net (W x D x H)	mm	750 x 198 x 280	835 x 198 x 280	835 x 198 x 280	990 x 218 x 315	1186 x 258 x 340
	Gross (W x D x H)	mm	830 x 270 x 355	910 x 270 x 355	910 x 270 x 355	1065 x 300 x 400	1265 x 420 x 340
	Net / Gross Weight	Kg	8 / 10	9 / 11	9 / 11	12 / 14	18 / 23
	Refrigeration Pipe Size: Liquid / Gas	mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.7	Ø9.52 / Ø12.7
Control	Type	Wireless Remote Control					
Indoor Operating Range	°C	17 ~ 30					

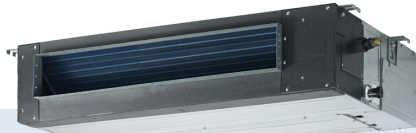

Slim Ducted

INDOOR UNIT - SLIM DUCTED		MINSD020	MINSD026	MINSD035	MINSD052	MINSD070	
Power supply	V-Ph-Hz	220~240-1-50					
COOLING Rated Capacity (Range)	kW	2.0 (1.71 ~ 3.71)	2.6 (1.90 ~ 4.04)	3.5 (2.21 ~ 4.71)	5.2 (3.03 ~ 6.46)	7.0 (4.25 ~ 9.06)	
HEATING Rated Capacity (Range)	kW	2.3 (1.78 ~ 3.79)	2.9 (1.97 ~ 4.20)	3.8 (2.25 ~ 4.80)	5.5 (3.13 ~ 6.68)	7.5 (3.93 ~ 8.38)	
Power Input	W	30	40	50	80	100	
Rated Current	A	0.13	0.18	0.23	0.37	0.46	
Airflow (Hi / Med / Lo)	L/s	167 / 150 / 128	167 / 150 / 128	200 / 167 / 150	222 / 170 / 145	389 / 333 / 303	
Maximum External Static Pressure (Hi)	Pa	40	40	40	70	70	
Sound Pressure (Hi / Med / Lo) @1m	dB(A)	36 / 33 / 30	36 / 33 / 30	39 / 36 / 34	42 / 39 / 37	45 / 41 / 38	
Dimensions	Net (W x D x H)	mm	700 x 635 x 210	700 x 635 x 210	700 x 635 x 210	920 x 635 x 210	920 x 635 x 270
	Gross (W x D x H)	mm	915 x 655 x 290	915 x 655 x 290	915 x 655 x 290	1135 x 655 x 290	1135 x 655 x 350
	Net / Gross Weight	kg	18 / 23	18 / 23	18 / 23	23 / 29	28 / 32
	Refrigeration Pipe Size: Liquid / Gas	mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.7	Ø9.52 / Ø12.7
Condensate Drain Connection	mm	OD Ø25	OD Ø25	OD Ø25	OD Ø25	OD Ø25	
Control	Type	Wired Manual Thermostat					
Indoor Operating Range	oC	17 ~ 30					



Outdoor Unit

OUTDOOR UNIT			MON2H053	MON3H076	MON4H078	MON5H105	MON5H136
Maximum Number of connected Indoor Units		Qty	2	3	4	5	5
Power Supply		V-Ph-Hz	220~240-1-50				
Cooling	Rated Capacity (Maximum)	kW	5.3 (6.77)	7.6 (10.18)	7.7 (10.96)	10.4 (12.68)	13.6 (15.12)
	Power Input		1.48	2.25	2.23	3.05	3.57
	Running Current	A	6.6	9.96	9.86	13.36	15.6
	AEER	W/W	3.48	3.27	3.35	3.33	3.71
	Star Rating		2	2	2	2	2.5
Heating	Rated Capacity (Maximum)	kW	5.8 (6.86)	8.1 (10.18)	8.4 (11.03)	11.6 (13.48)	14.5 (15.54)
	Power Input		1.60	2.16	2.30	3.09	4.327
	Running Current	A	7.16	9.58	10.22	13.56	18.88
	ACOP	W/W	3.50	3.62	3.53	3.64	3.618
	Star Rating		2.5	2.5	2.5	2.5	2.5
Compressor		Type	Twin-rotary	Twin-rotary	Twin-rotary	Twin-rotary	Twin-rotary
Maximum Input Current		A	14.5	16.5	17.0	25.0	26.0
Sound Power Level		dB(A)	67	69	69	73	73
Sound Pressure @ 1m			60	60	61	64	64
Dimensions	Net (W x D x H)	mm	845 x 320 x 700	900 x 315 x 860	900 x 315 x 860	990 x 345 x 965	938 x 392 x 1369
	Gross (W x D x H)	mm	965 x 395 x 755	1043 x 395 x 915	1043 x 395 x 915	1120 x 435 x 1100	1095 x 495 x 1505
	Net / Gross Weight	kg	48 / 52	62 / 66	64 / 68	89 / 93	100 / 112
Refrigerant		Type	R410A				
Refrigerant Piping	Connection Size: Liquid Line	mm	2x Ø6.35	3x Ø6.35	4x Ø6.35	5x Ø6.35	5x Ø6.35
	Connection Size: Gas		2x Ø9.52	2x Ø9.52 1x Ø12.7	3x Ø9.52 1x Ø12.7	4x Ø9.52 1x Ø12.7	*4x Ø9.52 1x Ø12.7"
	Maximum Total System Pipe Length		30	45	60	75	75
	Pre-Charged Length		20	30	40	50	50
	Maximum Length Per Indoor Unit		20	25	30	30	30
	Maximum Vertical Separation Outdoor Unit ABOVE Indoor Unit	m	10	10	10	10	10
	Maximum Vertical Separation Outdoor Unit BELOW Indoor Unit		15	15	15	15	15
	Maximum Height Difference Between Indoor Units		10	10	10	10	10
Ambient Operating Range	Cooling	°C	-15 ~ 50				
	Heating		-15 ~ 24				

Specifications subject to change without notice. Capacities tested in accordance with AS 3823.3, with 5m interconnecting length for all attached Indoor Units. E & OE

TABLE 1: Brivis Outdoor Model: MON2H053

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052

Brivis Indoor Slim Ducted: MINSD020, MINSD026, MINSD035, MINSD052

Indoor Unit Combinations			COOLING					HEATING				
Operation	Unit ID		Capacity of each Indoor Unit (kW)		System Capacity (kW)			Capacity of each Indoor Unit (kW)		System Capacity (kW)		
	Unit A	Unit B	Room A	Room B	Minimum	Rated	Maximum	Room A	Room B	Minimum	Rated	Maximum
1 Unit	20		2.85		1.71	2.85	3.45	2.96		2.07	2.96	3.58
	26		3.16		2.05	3.16	3.82	3.28		2.30	3.28	3.97
	35		3.68		2.39	3.68	4.45	3.75		2.44	3.75	4.54
	52		5.05		3.28	5.05	6.11	5.22		3.24	5.22	6.32
2 Units	20	20	2.43	2.43	3.01	4.86	5.59	2.49	2.49	2.99	4.98	5.73
	20	26	2.20	2.85	3.13	5.05	5.81	2.28	2.97	3.15	5.25	6.04
	20	35	2.06	3.30	3.32	5.36	6.16	2.09	3.35	3.26	5.44	6.26
	20	52	1.55	4.09	3.50	5.64	6.49	1.62	4.31	3.56	5.93	6.82
	26	26	2.60	2.60	3.22	5.20	5.98	2.69	2.69	3.23	5.38	6.19
	26	35	2.42	2.98	3.35	5.40	6.21	2.54	3.12	3.40	5.66	6.51
	26	52	2.76	3.39	3.81	6.15	6.77	2.80	3.44	3.74	6.24	6.86
	35	35	2.98	2.98	3.70	5.96	6.56	3.04	3.04	3.65	6.08	6.69

Capacities tested in accordance with AS 3823.3, with 5m interconnecting length for all attached Indoor Units. Specifications subject to change without notice.

TABLE 2: Brivis Outdoor Model: MON3H076

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052, MINHW070

Brivis Indoor Slim Ducted: MINSD020, MINSD026, MINSD035, MINSD052, MINSD070

Indoor Unit Combinations				COOLING						HEATING					
Operation	Unit ID			Capacity of each Indoor Unit (kW)			System Capacity (kW)			Capacity of each Indoor Unit (kW)			System Capacity (kW)		
	UnitA	Unit B	Unit C	Room A	Room B	Room C	Minimum	Rated	Maximum	Room A	Room B	Room C	Minimum	Rated	Maximum
1 Unit	20			2.85			1.71	2.85	3.65	2.96			1.78	2.96	3.79
	26			3.16			2.05	3.16	4.04	3.28			2.13	3.28	4.20
	35			3.68			2.39	3.68	4.71	3.75			2.44	3.75	4.80
	52			5.05			3.13	5.05	6.46	5.22			3.24	5.22	6.68
	70			7.08			4.39	7.08	9.06	6.55			4.06	6.55	8.38
2 Units	20	20		2.43	2.43		3.01	4.86	5.59	2.56	2.56		3.17	5.12	5.89
	20	26		2.28	2.97		3.26	5.25	6.04	2.37	3.08		3.38	5.45	6.27
	20	35		2.22	3.54		3.57	5.76	6.62	2.21	3.53		3.56	5.74	6.60
	20	52		1.87	4.67		4.05	6.54	7.52	1.95	4.88		4.23	6.83	7.85
	20	70		1.66	5.80		4.63	7.46	8.58	1.84	6.42		5.12	8.26	9.50
	26	26		2.73	2.73		3.38	5.45	6.27	2.79	2.79		3.46	5.58	6.42
	26	35		2.80	3.44		3.87	6.24	7.18	2.63	3.23		3.63	5.86	6.74
	26	52		2.31	4.44		4.19	6.75	7.76	2.51	4.83		4.55	7.34	8.44
	26	70		2.13	5.75		4.89	7.88	9.06	2.25	6.07		5.16	8.32	9.57
	35	35		3.36	3.36		4.17	6.72	7.73	3.36	3.36		4.17	6.72	7.73
	35	52		2.74	4.54		4.51	7.28	8.37	3.12	5.16		5.13	8.28	9.52
	35	70		2.72	5.43		5.05	8.15	9.37	2.88	5.77		5.36	8.65	9.95
	52	52		4.01	4.01		4.97	8.02	9.22	4.23	4.23		5.24	8.45	9.72
3 Units	20	20	20	2.20	2.20	2.20	4.09	6.60	7.59	2.27	2.27	2.27	4.22	6.80	7.82
	20	20	26	2.04	2.04	2.65	4.17	6.72	7.73	2.10	2.10	2.73	4.29	6.92	7.96
	20	20	35	2.01	2.01	3.22	4.50	7.25	8.34	2.07	2.07	3.31	4.62	7.45	8.57
	20	20	52	1.82	1.82	4.54	5.07	8.18	9.41	1.80	1.80	4.78	5.20	8.38	9.64
	20	20	70	1.61	1.61	5.63	5.48	8.84	10.17	1.84	1.84	4.87	5.29	8.54	9.82
	20	26	26	2.01	2.62	2.62	4.50	7.25	8.34	2.07	2.69	2.69	4.62	7.45	8.57
	20	26	35	2.05	2.66	3.27	4.95	7.98	9.18	2.10	2.73	3.36	5.07	8.18	9.41
	20	26	52	1.76	2.29	4.40	5.23	8.44	9.71	1.80	2.34	4.50	5.36	8.64	9.94
	20	35	35	1.85	3.24	3.24	5.17	8.34	9.59	1.90	3.32	3.32	5.29	8.54	9.82
	20	35	52	1.63	2.85	4.07	5.30	8.55	9.83	1.69	2.95	4.21	5.49	8.85	10.18
	26	26	26	2.60	2.60	2.60	4.84	7.80	8.97	2.69	2.69	2.69	5.00	8.06	9.27
	26	26	35	2.47	2.47	3.32	5.12	8.26	9.50	2.53	2.53	3.40	5.25	8.46	9.73
	26	26	52	2.17	2.17	4.17	5.27	8.50	9.78	2.20	2.20	4.24	5.36	8.64	9.94
	26	35	35	2.29	3.08	3.08	5.23	8.44	9.71	2.34	3.15	3.15	5.36	8.64	9.94
	26	35	52	2.07	2.79	3.99	5.49	8.85	10.18	2.00	2.69	3.85	5.29	8.54	9.82
	35	35	35	2.85	2.85	2.85	5.30	8.55	9.83	2.95	2.95	2.95	5.49	8.85	10.18

Capacities tested in accordance with AS 3823.3, with 5m interconnecting length for all attached Indoor Units. Specifications subject to change without notice.

TABLE 3: Brivis Outdoor Model: MON4H078

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052, MINHW070

Bravis Indoor Slim Ducted: MINS020, MINS026, MINS035, MINS052, MINS070

Indoor Unit Combinations					COOLING							HEATING							
Operation	Unit ID				Capacity of each Indoor Unit (kW)				System Capacity (kW)			Capacity of each Indoor Unit (kW)				System Capacity (kW)			
	Unit A	Unit B	Unit C	Unit D	Room A	Room B	Room C	Room D	Minimum	Rated	Maximum	Room A	Room B	Room C	Room D	Minimum	Rated	Maximum	
1 Unit	20				2.85				1.71	2.85	3.65	2.96					1.78	2.96	3.79
	26				3.16				2.05	3.16	4.04	3.28					2.13	3.28	4.20
	35				3.68				2.39	3.68	4.71	3.75					2.44	3.75	4.80
	52				5.05				3.13	5.05	6.46	5.22					3.24	5.22	6.68
	70				7.08				4.39	7.08	9.06	6.55					4.06	6.55	8.38
2 Units	20	20			2.43	2.43			3.01	4.86	5.59	2.56	2.56				3.17	5.12	5.89
	20	26			2.28	2.97			3.26	5.25	6.04	2.37	3.08				3.38	5.45	6.27
	20	35			2.22	3.54			3.57	5.76	6.62	2.21	3.53				3.56	5.74	6.60
	20	52			1.87	4.67			4.05	6.54	7.52	1.95	4.88				4.23	6.83	7.85
	20	70			1.66	5.80			4.63	7.46	8.58	1.84	6.42				5.12	8.26	9.50
	26	26			2.73	2.73			2.29	5.45	6.65	2.79	2.79				2.34	5.58	6.81
	26	35			2.80	3.44			2.62	6.24	7.61	2.63	3.23				2.46	5.86	7.15
	26	52			2.31	4.44			2.84	6.75	8.24	2.51	4.83				3.08	7.34	8.95
	26	70			2.13	5.75			4.89	7.88	9.06	2.25	6.07				5.16	8.32	9.57
	35	35			3.36	3.36			2.82	6.72	8.20	3.36	3.36				2.82	6.72	8.20
	35	52			2.74	4.54			3.06	7.28	8.88	3.12	5.16				3.48	8.28	10.10
	35	70			2.72	5.43			5.05	8.15	9.37	2.88	5.77				5.36	8.65	9.95
52	52			4.05	4.05			3.40	8.09	9.87	4.05	4.05				3.40	8.09	9.87	
3 Units	20	20	20		2.20	2.20	2.20		2.77	6.60	8.05	2.27	2.27	2.27			2.86	6.80	8.30
	20	20	26		2.04	2.04	2.65		2.82	6.72	8.20	2.10	2.10	2.73			2.91	6.92	8.44
	20	20	35		1.93	1.93	3.38		3.05	7.25	8.85	2.07	2.07	3.31			3.13	7.45	9.09
	20	20	52		1.82	1.82	4.54		3.44	8.18	9.98	1.80	1.80	4.78			3.52	8.38	10.22
	20	20	70		1.61	1.61	5.63		3.71	8.84	10.78	1.84	1.84	4.87			3.59	8.54	10.42
	20	26	26		2.01	2.62	2.62		3.05	7.25	8.85	2.07	2.69	2.69			3.13	7.45	9.09
	20	26	35		2.05	2.66	3.27		3.35	7.98	9.74	2.10	2.73	3.36			3.44	8.18	9.98
	20	26	52		1.78	2.32	4.46		3.60	8.56	10.44	1.78	2.32	4.46			3.60	8.56	10.44
	20	26	70		1.53	1.98	5.34		3.72	8.85	10.80	1.47	1.91	5.15			3.59	8.54	10.42
	20	35	35		1.85	3.24	3.24		3.50	8.34	10.17	1.90	3.32	3.32			3.59	8.54	10.42
	20	35	52		1.65	2.88	4.12		3.63	8.65	10.55	1.65	2.88	4.12			3.63	8.65	10.55
	26	26	26		2.60	2.60	2.60		3.28	7.80	9.52	2.69	2.69	2.69			3.39	8.06	9.83
	26	26	35		2.47	2.47	3.32		3.47	8.26	10.08	2.47	2.47	3.32			3.47	8.26	10.08
	26	26	52		2.19	2.19	4.22		3.61	8.60	10.49	2.19	2.19	4.22			3.61	8.60	10.49
	26	35	35		2.29	3.08	3.08		3.54	8.44	10.30	2.34	3.15	3.15			3.63	8.64	10.54
26	35	52		2.07	2.79	3.99		3.72	8.85	10.80	2.00	2.69	3.85			3.59	8.54	10.42	
35	35	35		2.85	2.85	2.85		3.59	8.55	10.43	2.95	2.95	2.95			3.72	8.85	10.80	
4 Units	20	20	20	20	1.90	1.90	1.90	1.90	2.45	7.60	9.27	1.95	1.95	1.95	1.95	2.45	7.80	9.52	
	20	20	20	26	1.83	1.83	1.83	2.38	3.22	7.86	9.59	1.83	1.83	1.83	2.38	3.22	7.86	9.59	
	20	20	20	35	1.77	1.77	1.77	2.83	3.34	8.15	9.94	1.79	1.79	1.79	2.87	3.38	8.25	10.07	
	20	20	20	52	1.59	1.59	1.59	4.20	3.67	8.96	10.93	1.53	1.53	1.53	4.06	3.55	8.66	10.57	
	20	20	26	26	1.75	1.75	2.28	2.28	3.31	8.07	9.85	1.80	1.80	2.34	2.34	3.39	8.27	10.09	
	20	20	26	35	1.73	1.73	2.24	2.76	3.47	8.46	10.32	1.75	1.75	2.27	2.80	3.51	8.56	10.44	
	20	20	35	35	1.67	1.67	2.66	2.66	3.55	8.66	10.57	1.70	1.70	2.73	2.73	3.63	8.86	10.81	
	20	26	26	26	1.68	2.19	2.19	2.19	3.38	8.25	10.07	1.70	2.22	2.22	2.22	3.42	8.35	10.19	
	20	26	26	35	1.70	2.21	2.21	2.71	3.62	8.82	10.76	1.72	2.23	2.23	2.74	3.66	8.92	10.88	
	20	26	35	35	1.63	2.12	2.61	2.61	3.68	8.98	10.96	1.64	2.14	2.63	2.63	3.71	9.04	11.03	
	26	26	26	26	2.13	2.13	2.13	2.13	3.49	8.52	10.39	2.16	2.16	2.16	2.16	3.53	8.62	10.52	
26	26	26	35	2.09	2.09	2.09	2.58	3.63	8.86	10.81	2.12	2.12	2.12	2.61	3.67	8.96	10.93		

Capacities tested in accordance with AS 3823.3, with 5m interconnecting length for all attached Indoor Units. Specifications subject to change without notice.

TABLE 4: Brivis Outdoor Model: MON5H105

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052, MINHW070

Brivis Indoor Slim Ducted: MINS020, MINS026, MINS035, MINS052, MINS070

Indoor Unit Combinations						COOLING								HEATING							
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Minimum	Rated	Maximum	Room A	Room B	Room C	Room D	Room	Minimum	Rated	Maximum
1 Unit	20					2.85					1.71	2.85	3.71	2.96					1.78	2.96	3.55
	26					3.16					1.90	3.16	3.79	3.28					1.97	3.28	3.94
	35					3.68					2.21	3.68	4.42	3.75					2.25	3.75	4.50
	52					5.05					3.03	5.05	5.81	5.22					3.13	5.22	6.00
	70					7.08					4.25	7.08	8.14	6.55					3.93	6.55	7.53
2 Units	20	20				2.20	2.20				2.64	4.40	5.06	2.60	2.60				3.12	5.20	5.98
	20	26				2.30	2.76				3.04	5.06	5.82	2.30	3.22				3.31	5.52	6.35
	20	35				2.30	3.75				3.63	6.05	6.96	2.40	4.20				3.96	6.60	7.59
	20	52				2.20	5.50				3.85	7.70	8.86	2.40	5.30				3.85	7.70	8.86
	20	70				1.90	6.83				4.37	8.73	9.17	2.10	7.08				4.59	9.18	9.64
	26	26				2.86	2.86				3.43	5.72	6.58	3.12	3.12				3.74	6.24	7.18
	26	35				2.90	3.81				3.36	6.71	7.72	3.20	4.12				3.66	7.32	8.42
	26	52				2.90	5.08				3.99	7.98	9.18	3.05	5.31				4.18	8.36	9.61
	26	70				2.50	6.81				4.66	9.31	9.78	2.70	7.09				4.90	9.79	10.28
	35	35				3.64	3.64				3.64	7.28	8.37	4.20	4.20				4.20	8.40	9.66
	35	52				3.40	4.93				4.17	8.33	9.58	3.80	5.13				4.46	8.93	10.26
	35	70				3.40	6.79				5.09	10.19	10.69	3.70	7.12				5.41	10.82	11.36
	52	52				4.85	4.85				4.85	9.70	10.19	5.05	5.05				5.05	10.10	10.61
	52	70				4.20	6.24				5.22	10.44	10.96	4.90	6.50				5.70	11.40	11.97
	70	70				5.95	5.95				5.95	11.90	12.02	6.16	6.16				6.16	12.32	12.44
3 Units	20	20	20			2.20	2.20	2.20			3.30	6.60	7.26	2.40	2.40	2.40			3.60	7.20	7.92
	20	20	26			2.20	2.20	2.86			3.63	7.26	7.99	2.40	2.40	3.12			3.96	7.92	8.71
	20	20	35			2.10	2.10	3.68			3.94	7.88	8.66	2.40	2.40	4.20			4.50	9.00	9.90
	20	20	52			2.10	2.10	5.25			4.73	9.45	9.92	2.20	2.20	5.50			4.95	9.90	10.40
	20	20	70			1.90	1.90	5.55			4.68	9.35	9.82	2.10	2.10	6.47			5.34	10.67	11.20
	20	26	26			2.20	2.86	2.86			3.96	7.92	8.71	2.40	3.12	3.12			4.32	8.64	9.50
	20	26	35			2.10	2.70	3.71			4.25	8.51	9.36	2.40	3.10	4.22			4.86	9.72	10.69
	20	26	52			2.10	2.65	4.66			4.70	9.41	9.88	2.30	2.76	5.50			5.28	10.56	11.09
	20	26	70			1.80	2.40	5.66			4.93	9.86	10.35	1.90	2.50	6.85			5.63	11.25	11.81
	20	35	35			2.08	3.55	3.55			4.59	9.18	9.64	2.40	3.90	4.05			5.18	10.35	10.87
	20	35	52			2.10	3.60	4.59			5.15	10.29	10.80	2.20	3.70	5.13			5.51	11.03	11.58
	20	35	70			1.80	3.20	5.63			5.31	10.63	11.16	1.90	3.40	6.83			6.06	12.13	12.73
	20	52	52			1.80	4.50	4.50			5.40	10.80	11.34	2.10	5.07	5.07			6.12	12.24	12.85
	20	52	70			1.80	4.10	5.30			5.60	11.20	11.42	1.90	4.12	6.30			6.16	12.32	12.57
	20	70	70			1.80	4.70	4.70			5.60	11.20	11.54	1.82	5.25	5.25			6.16	12.32	12.57
	26	26	26			2.86	2.86	2.86			4.29	8.58	9.44	3.12	3.12	3.12			4.68	9.36	10.30
	26	26	35			2.76	2.76	3.62			4.57	9.14	10.05	2.80	2.80	3.97			4.79	9.57	10.53
	26	26	52			2.40	2.40	4.38			4.59	9.18	10.10	2.65	2.65	5.41			5.36	10.71	11.78
	26	26	70			2.40	2.40	5.45			5.12	10.25	10.76	6.31	2.76	2.76			5.92	11.83	12.43
	26	35	35			2.63	3.63	3.63			4.94	9.89	10.88	2.90	3.83	3.83			5.28	10.56	11.62
	26	35	52			2.40	3.30	4.62			5.16	10.32	10.84	2.70	3.70	5.26			5.83	11.66	12.24
	26	35	70			2.30	3.05	5.13			5.24	10.48	11.00	2.50	3.40	6.55			6.22	12.45	13.07
	26	52	52			2.31	4.20	4.20			5.36	10.71	11.25	2.40	4.91	4.91			6.11	12.22	12.83
	26	52	70			2.10	3.80	5.05			5.48	10.95	11.28	2.20	4.10	6.02			6.16	12.32	12.57
	35	35	35			3.36	3.36	3.36			5.04	10.08	10.58	3.85	3.85	3.85			5.78	11.55	12.13
	35	35	52			3.20	3.20	4.04			5.22	10.44	10.96	3.40	3.40	4.84			5.82	11.64	12.22
	35	35	70			2.90	2.90	5.12			5.46	10.92	11.79	3.10	3.10	6.12			6.16	12.32	12.57
	35	52	52			2.90	3.95	3.95			5.40	10.80	11.34	3.15	4.50	4.50			6.08	12.15	12.76
	35	52	70			2.40	3.80	4.96			5.58	11.16	11.49	2.80	3.90	5.62			6.16	12.32	12.57
4 Units	20	20	20	20		2.20	2.20	2.20	2.20		4.40	8.80	9.68	2.40	2.40	2.40	2.40		4.80	9.60	10.56
	20	20	20	26		2.10	2.10	2.10	2.73		4.52	9.03	9.93	2.20	2.20	2.20	2.86		4.73	9.46	10.41
	20	20	20	35		2.10	2.10	2.10	3.68		4.99	9.98	10.97	2.20	2.20	2.20	3.85		5.23	10.45	11.50
	20	20	20	52		2.05	2.05	2.05	4.30		5.23	10.45	11.50	2.05	2.05	2.05	5.18		5.67	11.33	12.46
	20	20	20	70		1.75	1.75	1.75	5.80		5.53	11.05	11.27	1.90	1.90	1.90	6.39		6.05	12.09	12.33
	20	20	26	26		2.10	2.10	2.73	2.73		4.83	9.66	10.63	2.20	2.20	2.86	2.86		5.06	10.12	11.13
	20	20	26	35		2.05	2.05	2.70	3.60		5.20	10.40	11.44	2.20	2.20	2.90	3.81		5.56	11.11	12.22
	20	20	26	52		1.90	1.90	2.50	4.37		5.34	10.67	11.74	2.10	2.10	2.80	4.83		5.92	11.83	13.02
	20	20	26	70		1.75	1.75	2.20	5.86		5.78	11.56	11.79	1.80	1.80	2.40	6.24		6.12	12.24	12.48
	20	20	35	35		1.90	1.90	3.32	3.33		5.23	10.45	11.50	2.02	2.02	3.23	4.28		5.78	11.55	12.71

TABLE 4: Brivis Outdoor Model: MON5H105 (Cont.)

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052, MINHW070

Brivis Indoor Slim Ducted: MINS020, MINS026, MINS035, MINS052, MINS070

Indoor Unit Combinations						COOLING							HEATING								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Minimum	Rated	Maximum	Room A	Room B	Room C	Room D	Room E	Minimum	Rated	Maximum
4 Units	20	20	35	52		1.80	1.80	3.20	4.45		5.63	11.25	11.59	2.02	2.02	3.40	4.69		6.06	12.13	13.34
	20	20	35	70		1.60	1.60	2.90	5.50		5.80	11.60	11.83	1.80	1.80	2.90	5.82		6.16	12.32	12.57
	20	20	52	52		1.85	1.85	4.10	4.10		5.95	11.90	12.14	1.70	1.70	4.46	4.46		6.16	12.32	12.57
	20	20	52	70		1.60	1.60	3.90	4.90		6.00	12.00	12.24	1.70	1.70	3.90	5.02		6.16	12.32	12.57
	20	26	26	26		2.13	2.72	2.72	2.72		5.15	10.29	10.50	2.20	2.86	2.86	2.86		5.39	10.78	11.00
	20	26	26	35		1.95	2.55	2.55	3.44		5.24	10.49	10.70	2.20	2.70	2.70	3.64		5.62	11.24	11.46
	20	26	26	52		1.90	2.50	2.50	4.08		5.49	10.98	11.20	2.10	2.50	2.50	4.73		5.92	11.83	12.07
	20	26	35	35		1.90	2.45	3.22	3.22		5.39	10.79	11.00	2.13	2.70	3.50	3.50		5.92	11.83	12.07
	20	26	35	52		1.80	2.30	2.90	4.14		5.57	11.14	11.36	1.90	2.50	3.40	4.38		6.09	12.18	12.43
	20	26	35	70		1.60	2.20	2.70	5.43		5.96	11.93	12.17	1.80	1.80	3.10	5.62		6.16	12.32	12.57
	20	26	52	52		1.60	2.20	3.94	3.94		5.84	11.68	11.91	1.81	2.30	4.15	4.15		6.21	12.41	12.66
	20	35	35	35		1.83	3.14	3.14	3.14		5.63	11.25	11.48	2.11	3.34	3.34	3.34		6.06	12.13	12.37
	20	35	35	52		1.80	3.10	3.10	3.90		5.95	11.90	12.14	1.90	3.20	3.20	4.02		6.16	12.32	12.57
	20	35	35	70		1.60	2.70	2.70	5.00		6.00	12.00	12.24	1.70	2.80	2.80	5.02		6.16	12.32	12.57
	26	26	26	26		2.58	2.57	2.57	2.58		5.15	10.30	10.50	2.52	2.52	2.52	2.53		5.04	10.09	10.29
	26	26	26	35		2.52	2.52	2.52	3.40		5.48	10.96	11.18	2.52	2.52	2.52	3.40		5.48	10.96	11.18
	26	26	26	52		2.40	2.40	2.40	4.06		5.63	11.26	11.49	2.60	2.60	2.60	3.72		5.76	11.52	11.75
	26	26	26	70		2.20	2.20	2.20	4.94		5.77	11.54	11.77	2.20	2.20	2.20	5.72		6.16	12.32	12.57
	26	26	35	35		2.30	2.30	3.07	3.07		5.37	10.74	10.95	2.52	2.52	3.40	3.39		5.92	11.83	12.07
	26	26	35	52		2.30	2.30	3.10	3.95		5.82	11.65	11.88	2.40	2.40	3.20	4.19		6.10	12.19	12.44
	26	26	35	70		2.10	2.10	2.80	5.00		6.00	12.00	12.24	2.10	2.10	2.90	5.22		6.16	12.32	12.57
	26	35	35	35		2.32	2.94	2.94	2.94		5.57	11.14	11.36	2.40	3.13	3.13	3.13		5.90	11.79	12.03
	26	35	35	52		2.10	2.80	2.80	3.98		5.84	11.68	11.91	2.10	3.10	3.10	4.02		6.16	12.32	12.57
	35	35	35	35		2.80	2.80	2.80	2.80		5.60	11.20	11.42	3.08	3.08	3.08	3.08		6.16	12.32	12.57
	35	35	35	52		2.70	2.70	2.70	3.90		6.00	12.00	12.24	2.80	2.80	2.80	3.92		6.16	12.32	12.57
5 Units	20	20	20	20	20	2.08	2.08	2.08	2.08	2.08	5.25	10.40	11.03	2.20	2.20	2.20	2.20	2.20	5.50	11.00	11.55
	20	20	20	20	26	2.03	2.03	2.03	2.03	2.68	5.57	10.80	11.59	2.10	2.10	2.10	2.10	2.73	5.57	11.13	11.69
	20	20	20	20	35	1.95	1.95	1.95	1.95	3.47	5.64	11.27	11.83	2.10	2.10	2.10	2.10	3.33	5.87	11.73	12.32
	20	20	20	20	52	1.74	1.74	1.74	1.74	4.75	5.85	11.70	12.29	1.90	1.90	1.90	1.90	4.75	6.18	12.35	12.97
	20	20	20	20	70	1.70	1.70	1.70	1.70	5.28	6.04	12.08	12.68	1.80	1.80	1.80	1.80	5.64	6.42	12.84	13.48
	20	20	20	26	26	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41
	20	20	20	26	35	1.90	1.90	1.90	2.50	3.29	5.75	11.50	12.07	1.90	1.90	1.90	2.50	3.30	5.75	11.50	12.07
	20	20	20	26	52	1.79	1.79	1.79	2.33	4.25	5.98	11.97	12.57	1.90	1.90	1.90	2.50	4.04	6.12	12.24	12.85
	20	20	20	26	70	1.60	1.60	1.60	2.10	5.18	6.04	12.08	12.68	1.70	1.70	1.70	2.40	5.34	6.42	12.84	13.48
	20	20	20	35	35	1.70	1.70	1.70	3.17	3.17	5.72	11.44	12.01	1.80	1.80	1.80	3.15	3.15	5.85	11.70	12.29
	20	20	20	35	52	1.70	1.70	1.70	2.90	4.08	6.04	12.08	12.68	1.80	1.80	1.80	3.00	4.44	6.42	12.84	13.48
	20	20	26	26	26	1.90	1.90	2.47	2.47	2.47	5.61	11.21	11.77	2.05	2.05	2.65	2.65	2.64	6.02	12.04	12.64
	20	20	26	26	35	1.80	1.80	2.40	2.40	3.03	5.72	11.43	12.00	1.90	1.90	2.50	2.50	3.27	6.03	12.07	12.67
	20	20	26	26	52	1.70	1.70	2.20	2.20	4.28	6.04	12.08	12.68	1.80	1.80	2.30	2.30	4.64	6.42	12.84	13.48
	20	20	26	26	70	1.70	1.70	2.20	2.20	4.28	6.04	12.08	12.68	1.70	1.70	2.10	2.10	5.24	6.42	12.84	13.48
	20	20	26	35	35	1.70	1.70	2.30	2.93	2.93	5.78	11.56	12.14	1.80	1.80	2.30	3.17	3.17	6.12	12.24	12.85
	20	20	26	35	52	1.70	1.70	2.20	2.80	3.68	6.04	12.08	12.68	1.80	1.80	2.20	2.90	4.14	6.42	12.84	13.48
	20	20	35	35	35	1.66	1.66	2.76	2.76	2.76	5.80	11.60	12.18	1.82	1.82	3.04	3.04	3.04	6.38	12.76	13.40
	20	20	35	35	52	1.70	1.70	2.50	2.50	3.68	6.04	12.08	12.68	1.70	1.70	2.80	2.80	3.84	6.42	12.84	13.48
	20	26	26	26	26	1.80	2.34	2.34	2.34	2.34	5.58	11.16	11.72	1.91	2.53	2.53	2.53	2.53	6.01	12.03	12.63
	20	26	26	26	35	1.80	2.34	2.34	2.34	3.06	5.94	11.88	12.47	1.80	2.40	2.40	2.40	2.88	5.94	11.88	12.47
	20	26	26	26	52	1.70	2.20	2.20	2.20	3.78	6.04	12.08	12.68	1.80	2.20	2.20	2.20	4.44	6.42	12.84	13.48
	20	26	26	35	35	1.71	2.20	2.20	2.98	2.98	6.04	12.07	12.67	1.80	2.30	2.30	3.19	3.19	6.39	12.78	13.42
	20	26	26	35	52	1.70	2.10	2.10	2.50	3.68	6.04	12.08	12.68	1.70	2.10	2.10	2.90	4.04	6.42	12.84	13.48
	20	26	35	35	35	1.70	2.10	2.76	2.76	2.76	6.04	12.08	12.68	1.70	2.14	3.00	3.00	3.00	6.42	12.84	13.48
	20	35	35	35	35	1.68	2.60	2.60	2.60	2.60	6.04	12.08	12.68	1.64	2.80	2.80	2.80	2.80	6.42	12.84	13.48
	26	26	26	26	26	2.34	2.34	2.34	2.34	2.34	5.85	11.70	12.29	2.34	2.34	2.34	2.34	2.34	5.85	11.70	12.29
	26	26	26	26	35	2.20	2.20	2.20	2.20	2.90	5.85	11.70	12.28	2.30	2.30	2.30	2.30	3.04	6.12	12.24	12.85
	26	26	26	26	52	2.02	2.02	2.02	2.02	4.00	6.04	12.08	12.68	2.10	2.10	2.10	2.10	4.44	6.42	12.84	13.48
	26	26	26	35	35	2.11	2.11	2.11	2.87	2.87	6.04	12.07	12.67	2.20	2.20	2.20	2.95	2.95	6.25	12.50	13.12
	26	26	35	35	35	1.99	1.99	2.70	2.70	2.70	6.04	12.08	12.68	2.10	2.10	2.88	2.88	2.88	6.42	12.84	13.48
	26	35	35	35	35	2.08	2.50	2.50	2.50	2.50	6.04	12.08	12.68	2.04	2.70	2.70	2.70	2.70	6.42	12.84	13.48

Capacities tested in accordance with AS 3823.3, with 5m interconnecting length for all attached Indoor Units. Specifications subject to change without notice.

Table 5: Brivis Outdoor Model: MON5H136

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052, MINHW070

Brivis Indoor Slim Ducted: MINSD020, MINSD026, MINSD035, MINSD052, MINSD070

Indoor Unit Combinations						COOLING								HEATING								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)			
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Minium	Rated	Maximum	Room A	Room B	Room C	Room D	Room E	Minium	Rated	Maximum	
1 Unit	20					2.85					1.71	2.85	3.71	2.96						1.78	2.96	3.55
	26					3.16					1.90	3.16	3.79	3.28						1.97	3.28	3.94
	35					3.68					2.21	3.68	4.42	3.75						2.25	3.75	4.50
	52					5.05					3.03	5.05	5.81	5.22						3.13	5.22	6.00
	70					7.08					4.25	7.08	8.14	6.55						3.93	6.55	7.53
2 Units	20	20				2.20	2.20				2.64	4.40	5.06	2.60	2.60					3.12	5.20	5.98
	20	26				2.30	2.76				3.04	5.06	5.82	2.30	3.22					3.31	5.52	6.35
	20	35				2.30	3.75				3.63	6.05	6.96	2.40	4.20					3.96	6.60	7.59
	20	52				2.20	5.50				3.85	7.70	8.86	2.40	5.30					3.85	7.70	8.86
	20	70				1.90	6.83				4.37	8.73	9.17	2.10	7.08					4.59	9.18	9.64
	26	26				2.86	2.86				3.43	5.72	6.58	3.12	3.12					3.74	6.24	7.18
	26	35				2.90	3.81				3.36	6.71	7.72	3.20	4.12					3.66	7.32	8.42
	26	52				2.90	5.08				3.99	7.98	9.18	3.05	5.31					4.18	8.36	9.61
	26	70				2.50	6.81				4.66	9.31	9.78	2.70	7.09					4.90	9.79	10.28
	35	35				3.64	3.64				3.64	7.28	8.37	4.20	4.20					4.20	8.40	9.66
	35	52				3.40	4.93				4.17	8.33	9.58	3.80	5.13					4.46	8.93	10.26
	35	70				3.40	6.79				5.09	10.19	10.69	3.70	7.12					5.41	10.82	11.36
	52	52				4.85	4.85				4.85	9.70	10.19	5.05	5.05					5.05	10.10	10.61
	52	70				4.20	6.24				5.22	10.44	10.96	4.90	6.50					5.70	11.40	11.97
	70	70				5.95	5.95				5.95	11.90	12.02	6.16	6.16					6.16	12.32	12.44
3 Units	20	20	20			2.20	2.20	2.20			3.30	6.60	7.26	2.40	2.40	2.40				3.60	7.20	7.92
	20	20	26			2.20	2.20	2.86			3.63	7.26	7.99	2.40	2.40	3.12				3.96	7.92	8.71
	20	20	35			2.10	2.10	3.68			3.94	7.88	8.66	2.40	2.40	4.20				4.50	9.00	9.90
	20	20	52			2.10	2.10	5.25			4.73	9.45	9.92	2.20	2.20	5.50				4.95	9.90	10.40
	20	20	70			2.00	2.00	5.68			4.84	9.68	10.16	2.10	2.10	6.47				5.34	10.67	11.20
	20	26	26			2.20	2.86	2.86			3.96	7.92	8.71	2.40	3.12	3.12				4.32	8.64	9.50
	20	26	35			2.10	2.70	3.71			4.25	8.51	9.36	2.40	3.10	4.22				4.86	9.72	10.69
	20	26	52			2.10	2.65	4.66			4.70	9.41	9.88	2.30	2.76	5.50				5.28	10.56	11.09
	20	26	70			2.38	2.40	5.66			5.22	10.44	10.96	1.90	2.50	6.85				5.63	11.25	11.81
	20	35	35			2.08	3.55	3.55			4.59	9.18	9.64	2.40	3.90	4.05				5.18	10.35	10.87
	20	35	52			2.10	3.60	4.59			5.15	10.29	10.80	2.20	3.70	5.13				5.51	11.03	11.58
	20	35	70			2.10	3.20	5.70			5.50	11.00	11.55	1.90	3.40	6.83				6.06	12.13	12.73
	20	52	52			1.80	4.50	4.50			5.40	10.80	11.34	2.10	5.07	5.07				6.12	12.24	12.85
	20	52	70			1.90	4.10	5.76			5.88	11.76	12.00	1.90	4.12	6.30				6.16	12.32	12.57
	20	70	70			1.80	5.50	5.50			6.40	12.80	13.18	1.90	6.05	6.05				7.00	14.00	14.28
	26	26	26			2.86	2.86	2.86			4.29	8.58	9.44	3.12	3.12	3.12				4.68	9.36	10.30
	26	26	35			2.76	2.76	3.62			4.57	9.14	10.05	2.80	2.80	3.97				4.79	9.57	10.53
	26	26	52			2.40	2.40	4.38			4.59	9.18	10.10	2.65	2.65	5.41				5.36	10.71	11.78
	26	26	70			2.40	2.40	5.45			5.12	10.25	10.76	6.31	2.76	2.76				5.92	11.83	12.43
	26	35	35			2.63	3.63	3.63			4.94	9.89	10.88	2.90	3.83	3.83				5.28	10.56	11.62
	26	35	52			2.40	3.30	4.62			5.16	10.32	10.84	2.70	3.70	5.26				5.83	11.66	12.24
	26	35	70			2.39	3.05	5.69			5.57	11.14	11.69	2.50	3.40	6.55				6.22	12.45	13.07
	26	52	52			2.31	4.20	4.20			5.36	10.71	11.25	2.40	4.91	4.91				6.11	12.22	12.83
	26	52	70			2.10	4.10	5.92			6.06	12.12	12.48	2.50	4.50	6.50				6.75	13.50	13.77
	26	70	70			2.35	5.30	5.30			6.47	12.95	13.34	2.40	5.80	5.80				7.00	14.00	14.28
	35	35	35			3.36	3.36	3.36			5.04	10.08	10.58	3.85	3.85	3.85				5.78	11.55	12.13
	35	35	52			3.20	3.20	4.04			5.22	10.44	10.96	3.40	3.40	4.84				5.82	11.64	12.22
	35	35	70			2.95	2.96	5.99			5.95	11.90	12.85	3.40	3.40	6.50				6.65	13.30	13.57
	35	52	52			2.90	4.30	4.30			5.87	11.50	12.33	3.15	4.50	4.50				6.08	12.15	12.76
	35	52	70			2.86	4.10	5.91			6.43	12.87	13.25	3.30	4.30	6.40				7.00	14.00	14.28
	35	70	70			2.95	5.35	5.35			6.83	13.65	14.06	3.20	5.40	5.40				7.00	14.00	14.28
4 Units	20	20	20	20		2.20	2.20	2.20	2.20		4.40	8.80	9.68	2.40	2.40	2.40	2.40			4.80	9.60	10.56
	20	20	20	26		2.10	2.10	2.10	2.73		4.52	9.03	9.93	2.20	2.20	2.20	2.86			4.73	9.46	10.41
	20	20	20	35		2.10	2.10	2.10	3.68		4.99	9.98	10.97	2.20	2.20	2.20	3.85			5.23	10.45	11.50
	20	20	20	52		2.05	2.05	2.05	4.30		5.23	10.45	11.50	2.05	2.05	2.05	5.18			5.67	11.33	12.46
	20	20	20	70		1.75	1.75	1.75	5.80		5.53	11.05	11.27	1.90	1.90	1.90	6.39			6.05	12.09	12.33
	20	20	26	26		2.10	2.10	2.73	2.73		4.83	9.66	10.63	2.20	2.20	2.86	2.86			5.06	10.12	11.13
	20	20	26	35		2.05	2.05	2.70	3.60		5.20	10.40	11.44	2.20	2.20	2.90	3.81			5.56	11.11	12.22
	20	20	26	52		1.90	1.90	2.50	4.37		5.34	10.67	11.74	2.10	2.10	2.80	4.83			5.92	11.83	13.02
	20	20	26	70		1.79	1.79	2.40	5.99		5.98	11.97	12.21	1.80	1.80	2.40	6.24			6.12	12.24	12.48
	20	20	35	35		1.90	1.90	3.32	3.33		5.23	10.45	11.50	2.02	2.02	3.23	4.28			5.78	11.55	12.71
	20	20	35	52		1.80	1.80	3.20	4.45		5.63	11.25	11.59	2.02	2.02	3.40	4.69			6.06	12.13	13.34
	20	20	35	70		1.80	1.80	3.20	6.11		6.45	12.91	13.16	1.95	1.95	3.40	6.70			7.00	14.00	14.28
	20	20	52	52		1.85	1.85	4.38	4.38		6.23	12.46	12.71	1.90	1.90	4.89	4.89					

Table 5: Brivis Outdoor Model: MON5H136 (Cont.)

Brivis Indoor Hi-Wall: MINHW020, MINHW026, MINHW035, MINHW052, MINHW070

Brivis Indoor Slim Ducted: MINSD020, MINSD026, MINSD035, MINSD052, MINSD070

Indoor Unit Combinations						COOLING								HEATING							
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Minium	Rated	Maximum	Room A	Room B	Room C	Room D	Room E	Minium	Rated	Maximum
4 Units	20	26	35	70		1.80	2.30	3.10	6.09		6.64	13.29	13.55	1.90	2.50	3.30	6.50		7.10	14.20	14.48
	20	26	52	52		1.80	2.45	4.37	4.37		6.50	12.99	13.25	1.98	2.55	4.89	4.89		7.15	14.31	14.59
	20	26	52	70		1.80	2.20	4.20	5.50		6.85	13.70	13.97	1.90	2.50	4.10	6.00		7.25	14.50	14.79
	20	35	35	35		1.83	3.14	3.14	3.14		5.63	11.25	11.48	2.11	3.34	3.34	3.34		6.06	12.13	12.37
	20	35	35	52		1.80	3.10	3.10	4.46		6.23	12.46	12.71	1.92	3.45	3.45	4.90		6.86	13.72	13.99
	20	35	35	70		1.80	3.10	3.10	5.60		6.80	13.60	13.87	1.80	3.20	3.20	6.00		7.10	14.20	14.48
	20	35	52	52		1.90	3.11	4.24	4.24		6.74	13.49	13.75	1.90	3.30	4.50	4.50		7.10	14.20	14.48
	26	26	26	26		2.58	2.57	2.57	2.58		5.15	10.30	10.50	2.52	2.52	2.52	2.53		5.04	10.09	10.29
	26	26	26	35		2.52	2.52	2.52	3.40		5.48	10.96	11.18	2.52	2.52	2.52	3.40		5.48	10.96	11.18
	26	26	26	52		2.40	2.40	2.40	4.06		5.63	11.26	11.49	2.60	2.60	2.60	3.72		5.76	11.52	11.75
	26	26	26	70		2.35	2.35	2.35	6.12		6.59	13.17	13.44	2.50	2.50	2.50	6.70		7.10	14.20	14.48
	26	26	35	35		2.30	2.30	3.07	3.07		5.37	10.74	10.95	2.52	2.52	3.40	3.39		5.92	11.83	12.07
	26	26	35	52		2.30	2.30	3.20	4.39		6.10	12.19	12.44	2.52	2.52	3.45	4.94		6.71	13.43	13.69
	26	26	35	70		2.10	2.10	3.10	6.05		6.67	13.35	13.61	2.50	2.50	3.20	6.00		7.10	14.20	14.48
	26	26	52	52		2.30	2.30	4.31	4.31		6.61	13.22	13.49	2.50	2.50	4.60	4.60		7.10	14.20	14.48
	26	26	52	70		2.20	2.20	4.10	5.26		6.88	13.76	14.04	2.30	2.30	4.10	5.50		7.25	14.50	14.79
	26	35	35	35		2.36	3.10	3.10	3.10		5.83	11.66	11.89	2.49	3.45	3.45	3.45		6.42	12.84	13.09
	26	35	35	52		2.30	3.20	3.20	4.29		6.50	12.99	13.25	2.50	3.40	3.40	4.90		7.10	14.20	14.48
	26	35	35	70		2.30	2.90	2.90	5.60		6.85	13.70	13.97	2.30	3.20	3.20	5.80		7.25	14.50	14.79
	26	35	52	52		2.20	2.90	4.21	4.21		6.76	13.52	13.79	2.40	3.30	4.40	4.40		7.25	14.50	14.79
5 Units	35	35	35	35		3.08	3.08	3.08	3.08		6.16	12.32	12.57	3.43	3.43	3.43	3.43		6.86	13.72	13.99
	35	35	35	52		3.10	3.10	3.10	4.19		6.74	13.49	13.75	3.30	3.30	3.30	4.30		7.10	14.20	14.48
	35	35	35	70		2.90	2.90	2.90	5.10		6.90	13.80	14.08	3.00	3.00	3.00	5.50		7.25	14.50	14.79
	35	35	52	52		2.90	2.90	4.00	4.00		6.90	13.80	14.08	2.80	2.80	3.90	5.00		7.25	14.50	14.79
	35	35	52	70		2.80	2.80	3.90	4.50		7.00	14.00	14.28	2.70	2.70	3.90	5.20		7.25	14.50	14.79
	20	20	20	20	20	2.08	2.08	2.08	2.08	2.08	5.25	10.40	11.03	2.20	2.20	2.20	2.20	2.20	5.50	11.00	11.55
	20	20	20	20	26	2.03	2.03	2.03	2.03	2.68	5.57	10.80	11.59	2.10	2.10	2.10	2.10	2.73	5.57	11.13	11.69
	20	20	20	20	35	1.95	1.95	1.95	1.95	3.47	5.64	11.27	11.83	2.10	2.10	2.10	2.10	3.33	5.87	11.73	12.32
	20	20	20	20	52	1.98	1.98	1.98	1.98	4.95	6.44	12.87	13.51	1.95	1.95	1.95	1.95	4.94	6.37	12.74	13.38
	20	20	20	20	70	1.90	1.90	1.90	1.90	6.40	7.00	14.00	15.12	1.95	1.95	1.95	1.95	6.70	7.25	14.50	15.23
	20	20	20	26	26	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41
	20	20	20	26	35	1.97	1.97	1.97	2.55	3.52	5.99	11.98	12.58	1.95	1.95	1.95	2.55	3.46	5.93	11.86	12.45
	20	20	20	26	52	1.95	1.95	1.95	2.55	4.93	6.66	13.33	13.99	1.95	1.95	1.95	2.55	4.93	6.66	13.33	13.99
	20	20	20	26	70	1.90	1.90	1.90	2.40	5.90	7.00	14.00	15.12	1.90	1.90	1.90	2.50	6.30	7.25	14.50	15.23
	20	20	20	35	35	1.96	1.96	1.96	3.43	3.43	6.37	12.74	13.38	1.94	1.94	1.94	3.46	3.46	6.37	12.74	13.38
	20	20	20	35	52	1.80	1.80	1.80	2.90	5.70	7.00	14.00	15.12	1.95	1.95	1.95	3.30	4.85	7.00	14.00	14.70
	20	20	20	35	70	1.80	1.80	1.80	3.10	5.50	7.00	14.00	15.12	1.90	1.90	1.90	3.10	6.00	7.40	14.80	15.54
	20	20	20	52	52	1.80	1.80	1.80	4.30	4.30	7.00	14.00	15.12	1.90	1.90	1.90	4.55	4.55	7.40	14.80	15.54
	20	20	26	26	26	1.95	1.95	2.55	2.55	2.56	5.78	11.56	12.14	1.94	1.94	2.56	2.56	2.56	5.78	11.56	12.14
	20	20	26	26	35	1.95	1.95	2.55	2.55	3.45	6.22	12.45	13.07	1.95	1.95	2.56	2.56	3.43	6.22	12.45	13.07
20	20	26	26	52	2.00	2.00	2.55	2.55	4.90	7.00	14.00	15.12	1.95	1.95	2.55	2.55	5.00	7.00	14.00	14.70	
20	20	26	26	70	1.80	1.80	2.40	2.40	5.60	7.00	14.00	15.12	1.80	1.80	2.40	2.40	5.60	7.00	14.00	14.70	
20	20	26	35	35	1.95	1.95	2.55	3.44	3.44	6.66	13.33	13.99	1.95	1.95	2.53	3.45	3.45	6.66	13.33	13.99	
20	20	26	35	52	1.80	1.80	2.50	3.40	4.50	7.00	14.00	15.12	1.90	1.90	2.40	3.20	4.60	7.00	14.00	14.70	
20	20	26	35	70	1.80	1.80	2.30	3.10	5.00	7.00	14.00	15.12	1.80	1.80	2.50	3.20	5.50	7.40	14.80	15.54	
20	20	35	35	35	1.90	1.90	3.40	3.40	3.40	7.00	14.00	14.70	1.96	1.96	3.43	3.43	3.43	7.11	14.21	14.92	
20	20	35	35	52	1.80	1.80	3.10	3.10	4.20	7.00	14.00	15.12	1.80	1.80	3.10	3.10	4.20	7.00	14.00	14.70	
20	20	35	35	70	1.80	1.80	2.80	2.80	4.80	7.00	14.00	15.12	1.80	1.80	2.90	2.90	5.40	7.40	14.80	15.54	
20	20	35	52	52	1.80	1.80	2.80	3.80	3.80	7.00	14.00	15.12	1.80	1.80	3.10	4.05	4.05	7.40	14.80	15.54	
20	26	26	26	26	2.00	2.60	2.60	2.60	2.60	6.20	12.40	13.02	2.00	2.54	2.54	2.54	2.53	6.08	12.15	12.76	
20	26	26	26	35	2.00	2.60	2.60	2.60	3.40	6.60	13.20	13.86	1.95	2.55	2.55	2.55	3.34	6.47	12.94	13.58	
20	26	26	26	52	1.90	2.50	2.50	2.50	4.60	7.00	14.00	15.12	1.90	2.50	2.50	2.50	4.60	7.00	14.00	14.70	
20	26	26	26	70	1.80	2.30	2.30	2.30	5.30	7.00	14.00	15.12	1.80	2.40	2.40	2.40	5.80	7.40	14.80	15.54	
20	26	26	35	35	1.95	2.51	2.51	3.40	3.40	6.89	13.77	14.46	1.96	2.55	2.55	3.43	3.43	6.96	13.92	14.61	
20	26	26	35	52	1.80	2.50	2.50	3.10	4.10	7.00	14.00	15.12	1.90	2.50	2.50	2.80	4.30	7.00	14.00	14.70	
20	26	26	35	70	1.80	2.20	2.20	2.80	5.00	7.00	14.00	15.12	1.80	2.40	2.40	3.00	5.20	7.40	14.80	15.54	
20</																					

Talk to us

For all sales and
service enquiries:

Australia - Brivis Pty Ltd

Telephone: 1300 BRIVIS (1300 274 847)

Email: sales@brivis.com.au

Web: brivis.com.au

New Zealand - Distributed by Warm Air Ltd

Telephone: 0800 WARMAIR (0800 9276 247)

Email: sales@warmair.co.nz

Web: warmair.co.nz

South Africa - Distributed by Lorenz and Associates

Telephone: 0861 BRIVIS (0861 274 847)

Email: info@brivis.co.za

Web: brivis.co.za



Consult your local authorised Brivis
dealer for the best advice



GWA
Smarter Solutions

© Brivis Climate Systems Pty Ltd
AU: 24752 ABN: 64 096 079 088
All rights reserved SEP2014 FSA/BCS0007