MITSUBISHI ELECTRIC

AIR CONDITIONING SYSTEMS

Mitsubishi Electric Quality

Natural Comfort for Everybody

EAST MEETS WEST

Comfort and Style, Room to Room

Quiet, energy-saving, clean and attractive air conditioners in a variety of designs to suit diversified needs; this is the air conditioning excellence offered by Mitsubishi Electric. With stylish lines for the living room and quiet operation for the bedroom, our air conditioners are designed for comfort, durability, health and efficiency. Utilising accumulated expertise and innovative technologies, Mitsubishi Electric air conditioners provide advanced air control and comfort for all rooms.

Stylish Design

Small, smart, sophisticated. Indoor units for every room.

Quiet Operation

Hard at work to keep you comfortable, yet so quiet, you'll never notice it.

Only 19 dB

Energy Saving

Reduced power consumption, higher performance.

DC Inverter

Air Freshening

A unique air-cleaning system for constant delivery of fresh air.

Plasma Duo Filter Systems

Catechin

Mitsubishi Electric – Quality that brings comfort to life!

Are you looking for an energy efficient system that provides warm, even heat in winter and cool comfort in summer? The answer lies in reverse cycle air conditioning from Mitsubishi Electric.

Mitsubishi Electric has a model for you. Stylish lines for the living room and quiet operation for the bedroom. Designed for comfort, durability, health and efficiency, advanced air control from room to room. Mitsubishi Electric – quality that brings comfort to life.

Higher performance, lower power consumption and longer life.

When it comes to comfort, efficiency and durability, Mitsubishi Electric has a distinct advantage over the opposition, we call it MEQ – Mitsubishi Electric Quality. Simply put it is a superior standard that we apply to our own business. While other systems may meet stringent industry standards, Mitsubishi Electric continually strives to exceed them. MEQ delivers air conditioning systems at the leading edge of technology that operate efficiently in extreme weather conditions, year in year out.

MEQ gives us 3 important advantages:

Comfort: We have created products that are designed to provide you with exceptional comfort in your surroundings, in all weather conditions.

Efficiency: We strive for the perfect balance of performance, reliability, low power consumption and a long operational life span for all our products. The result is an air conditioning range that is rated amongst the best in the industry in terms of design, quality and energy efficiency.

Durability: We subject the indoor and outdoor units of all our systems to rigorous durability testing, which includes harsher temperature extremes than are likely to be found anywhere in the world. This allows us to produce higher quality products that protect your investment through years of reliable service.

The Mitsubishi Electric Story.

Our commitment to quality, service, research and development has helped us gain a leading position in today's marketplace.

Mitsubishi Electric have a proud history in the manufacturing and supply of leading edge electrical and electronic equipment for both domestic and commercial use. Our efforts to make indoor life more comfortable began in 1921, with the introduction of our first electric fan which became an instant hit. Some 10 years later we began to manufacture coolers, which were just as popular.

Since then our understanding that technology is the driving factor of change in our lives has seen us become a world leader in energy efficient air conditioning systems. However our development of breakthrough technologies and products is not just restricted to heating and cooling.

Since 1980 to the present day the pace at which Mitsubishi Electric has introduced and refined products that benefit society, industry and individuals, has been nothing less than astonishing.

These technologies include the world's first large scale LED Screen for sports arenas, the world's largest CRT television screen for the consumer market, the world's first spiral escalator, the world's fastest elevators, the antenna technology behind the world's first in-flight internet service, solar cell technology and much more. Today Mitsubishi Electric is a global giant with operations in over 35 countries, with more than 97,000 employees.

Our commitment to quality service, research and development has helped us gain a leading position in today's marketplace in a wide variety of areas including heating, cooling and air conditioning. Mitsubishi Electric's 'today technology' provides climate controlled comfort wherever you live, work and relax.

Whether it's consistent heating and cooling for the home or office, Mitsubishi Electric offers you state-of-the-art technology that is quiet, simple to use, reliable and above all, energy efficient.

Line-up

Wall-mounted

F Series P.16 / E Series P.19 / G Series P.21

MSZ-F Series

2.2kW	2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	8.0kW
	✔	✔ *1	✔ *1			

● DC Inverter ● Heat Pump ● Flat Panel ● Quiet Operation ● Plasma Duo ● i-see Sensor
● Mold Fighter ● Quick Clean ● 24-hour Timer ● Auto Change Over

MSZ-E Series

2.2kW	2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW	8.0kW
✔ *	✔	✔	✔	✔			

● DC Inverter ● Heat Pump ● Flat Panel ● Quiet Operation ● Nano Platinum Filter
● Weekly Timer ● 24-hour Timer ● Auto Change Over

MSZ-G Series

2.2kW	2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW	8.0kW
✔ *	✔	✔	✔	✔	✔	✔	✔

● Potentially Demand Response Capable (2.5kW–8.0kW) ● DC Inverter ● Heat Pump
● Flat Panel ● Quiet Operation ● Nano Platinum Filter (60/71/80) ● Catechin Filter (25/35/42/50)
● Electrostatic Anti-allergy Enzyme Filter (60/71/80) ● Quick Clean ● Weekly Timer (60/71/80)
● 24-hour Timer ● Auto Change Over ● Wide & Long Airflow ● Powerful Mode (60/71/80)

Floor-standing

P.24

MFZ Series

2.2kW	2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	8.0kW
	✔	✔	✔	✔ *2		

● DC Inverter ● Heat Pump ● Quiet Operation ● Nano Platinum Filter
● Anti-allergy Enzyme Filter ● i save Mode ● 24-hour Timer ● Auto Change Over

Ceiling-cassette / Ceiling-concealed

P.26

SLZ Series

2.2kW	2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	8.0kW
	✔	✔ *1	✔			

● Heat Pump ● Quiet Operation ● 2×2 Compact Size ● Long-life Filter ● Fresh-air Intake
● Weekly Timer ● Auto Change Over

SEZ Series



2.2kW	2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	8.0kW
	✔	✔	✔	✔	✔	

● DC Inverter ● Heat Pump ● Quiet Operation ● 200mm Compact Size ● Air Cleaning Filter
● Weekly Timer ● Auto Change Over

*1 Multi Series connection only.
*2 Single connection only.

Multi Series (Inverter Heat Pump)

P.29

	Wall-mounted	Floor-standing	Ceiling-suspended	Cassette	Ceiling-concealed
					
Up to **8** indoor units **MXZ-8B160VA** 15.5kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50/60/71/80 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50**		**SLZ-KA25/35/50** **PLA-RP60/71/100**	**SEZ-KD25/35/50/60/71** **PEAD-RP71/100**
Up to **8** indoor units **MXZ-8B140VA** 14.0kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50/60/71/80 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50**		**SLZ-KA25/35/50** **PLA-RP60/71/100**	**SEZ-KD25/35/50/60/71** **PEAD-RP71/100**
Up to **6** indoor units **MXZ-6D120VA** 12.0kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50/60/71/80 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50**	**PCA-RP50/60/71**	**SLZ-KA25/35/50** **PLA-KA60/71**	**SEZ-KD25/35/50/60/71** **PEAD-RP71**
Up to **5** indoor units **MXZ-5D100VA** 10.0kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50/60/71 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50**	**PCA-RP50/60/71**	**SLZ-KA25/35/50** **PLA-RP60/71**	**SEZ-KD25/35/50/60/71** **PEAD-RP71**
Up to **4** indoor units **MXZ-4D80VA** 8.0kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50/60/71 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50**	**PCA-RP50/60/71**	**SLZ-KA25/35/50** **PLA-RP60/71**	**SEZ-KD25/35/50/60/71** **PEAD-RP71**
Up to **4** indoor units **MXZ-4D71VA** 7.1kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50/60 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50***	**PCA-RP50/60**	**SLZ-KA25/35/50** **PLA-RP60**	**SEZ-KD25/35/50/60**
Up to **3** indoor units **MXZ-3D54VA** 5.4kW	**MSZ-F✻25/35/50** MSZ-G✻22/25/35/42/50 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35/50***	**PCA-RP50**	**SLZ-KA25/35/50**	**SEZ-KD25/35/50**
Up to **2** indoor units **MXZ-2D52VA** 5.2kW	**MSZ-F✻25/35** MSZ-G✻22/25/35/42/50 MSZ-E✻22/25/35/42/50	**MFZ-KJ25/35***		**SLZ-KA25/35**	**SEZ-KD25/35**

The details of Multi Series: Please refer to Multi-Split system brochure.
✻ When MFZ-KJ indoor unit (s) is connected to MXZ-2D52/3D54/4D71, additional refrigerant is required.

Inverter Technologies

Inverters – How They Work

Inverters electronically control the electrical voltage, current and frequency of electrical devices such as the compressor motor in an air conditioner. They receive information from sensors monitoring operating conditions, and adjust the revolution speed of the compressor, which directly regulates air conditioner output. Optimum control of operation frequency results in eliminating the consumption of excessive electricity and providing the most comfortable room environment.

True Comfort

Simple comparison of air conditioner operation control with and without an inverter.

Inverter operation image (cooling mode)

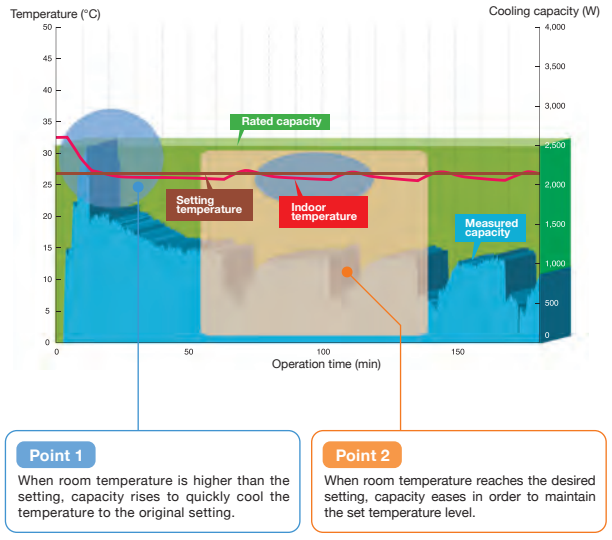

Point 1 Quick & Powerful

Increasing the compressor motor speed by controlling the operation frequency ensures powerful output at start-up, and brings the room temperature to the comfort zone faster than units not equipped with an inverter. Hot rooms are cooled, and cold rooms are heated faster and more efficiently.

Point 2 Room Temperature Maintained

The compressor motor operating frequency and the change of room temperature are monitored to calculate the most efficient waveform to maintain the room temperature in the comfort zone. This eliminates the large temperature swings common with non-inverter systems, and guarantees a pleasant, comfortable environment.

Economic Operation

Impressively low operating cost is a key advantage of inverter air conditioners. We've combined advanced inverter technologies with cutting-edge electronics and mechanical technologies to achieve a synergistic effect that enables improvements in heating/cooling performance efficiency. Better performance and lower energy consumption are the result.

[Energy efficiency comparison]

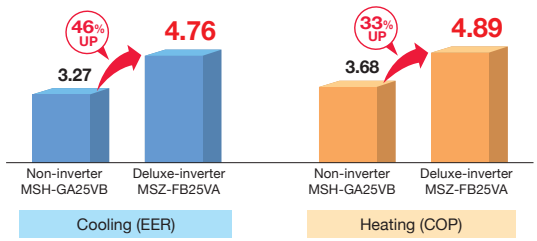

More Advantages with Mitsubishi Electric

Joint Lap DC Motor

Mitsubishi Electric has developed a unique motor, called the "Poki-Poki Motor" in Japan, which is manufactured using a joint lapping technique. This innovative motor operates based on a high-density, high-magnetic force, leading to extremely high efficiency and reliability.



Magnetic Flux Vector Sine Wave Drive

This drive device is actually a microprocessor that converts the compressor motor's electrical current waveform from a conventional waveform to a sine wave (180°conductance) to achieve higher efficiency by raising the motor winding utilisation ratio and reducing energy loss.

Vector-wave Eco Inverter

This inverter monitors the varying compressor motor frequency and creates the most efficient waveform for the motor speed. As the result, operating efficiency in all speed ranges is improved, less power is used and annual electricity cost is reduced.

Smooth wave pattern

Inverter size has been reduced using insert-molding, where the circuit pattern is molded into the synthetic resin. To ensure quiet operation, soft PWM control is used to prevent the metallic whine associated with conventional inverters.



Mitsubishi Electric inverters ensure superior performance including the optimum control of operation frequency. As a result, optimum power is applied in all heating/cooling ranges and maximum comfort is achieved while consuming minimal energy. Fast, comfortable operation and amazingly low running cost — That's the Mitsubishi Electric promise.

More Advantages with Mitsubishi Electric

Reluctance DC Rotary Compressor

Powerful neodymium magnets are used in the rotor of the reluctance DC motor. More efficient operation is realised by strong magnetic and reluctance torques produced by the magnets.

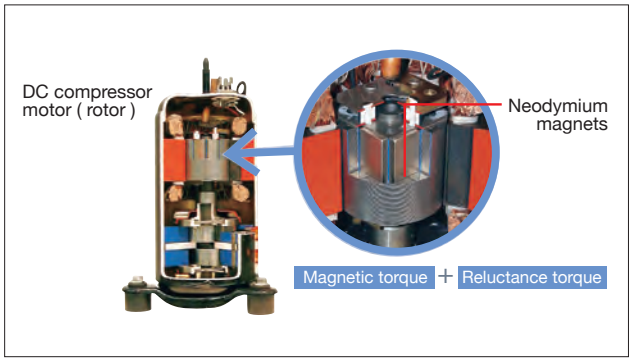

Highly Efficient DC Scroll Compressor

Higher efficiency has been achieved by adding a frame compliance mechanism to the DC scroll compressor. The mechanism allows movement in the axial direction of the frame supporting the cradle scroll, thereby greatly reducing leakage and friction loss, and ensuring extremely high efficiency at all speeds.

*Japan Society of Refrigerating and Air Conditioning Engineers

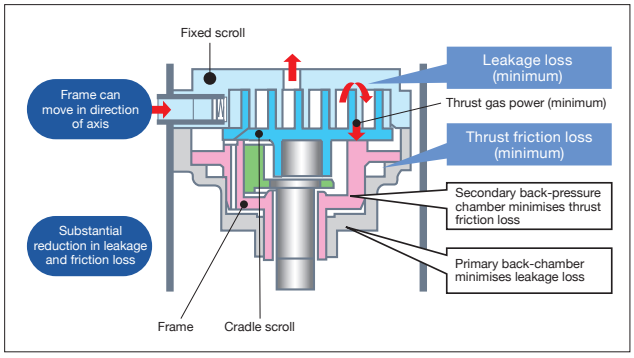

DC Fan Motor

A highly efficient DC motor drives the fan of the outdoor unit. Efficiency is much higher than an equivalent AC motor.

PAM (Pulse Amplitude Modulation)

PAM is a technology that controls the current waveform so that it resembles the supply voltage wave, thereby reducing loss and realising more efficient use of electricity. Using PAM control, 98% of the input power supply is used effectively.

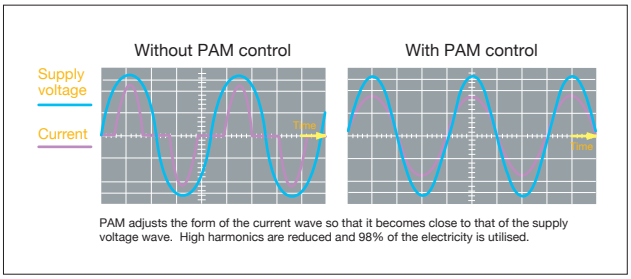

PAM adjusts the form of the current wave so that it becomes close to that of the supply voltage wave. High harmonics are reduced and 98% of the electricity is utilised.

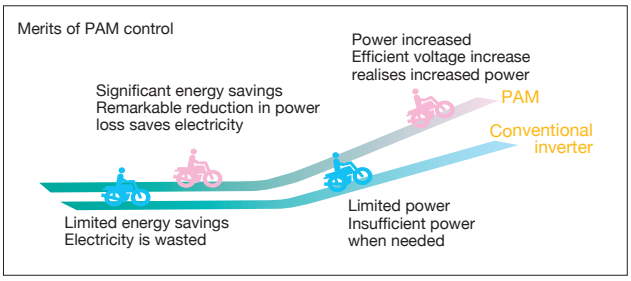

Power Receiver and Twin LEV Control

Mitsubishi Electric has developed a power receiver and twin linear expansion valve (LEV) circuit that optimise compressor performance. This technology ensures optimum control in response to operating waveform and outdoor temperature. Operating efficiency has been enhanced by tailoring the system to the characteristics of R410A refrigerant.

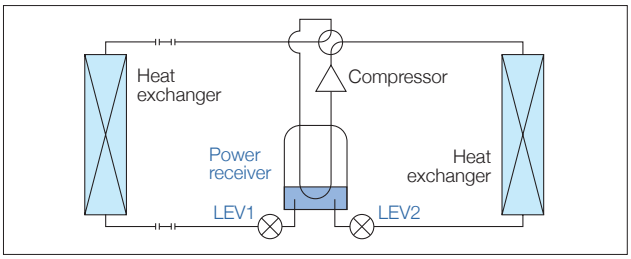

Grooved Piping

High-performance grooved piping is used in heat exchangers to increase the heat-exchange area.



Functions | 01

Energy-saving Operation

i-see Sensor Felt Temperature Control

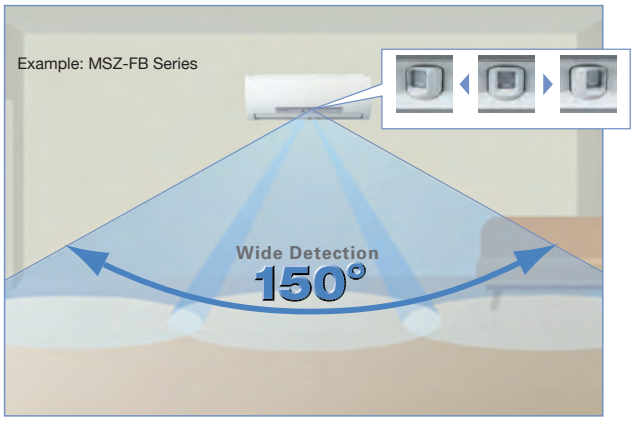

The "i-see Sensor" sweeps from side-to-side automatically monitoring the floor temperature over a wide area spanning 150°.

Conventional air conditioners monitor the air temperature at the top of a room to control room temperature and fail to take foot-level temperature, that which has the strongest impact on room comfort, into consideration. The "i-see Sensor" monitors the floor temperature and estimates the "felt temperature" (i.e., the temperature felt by people in the room). The airflow speed and temperature are adjusted to prevent over-heating/cooling, thereby eliminating the consumption of excessive electricity.

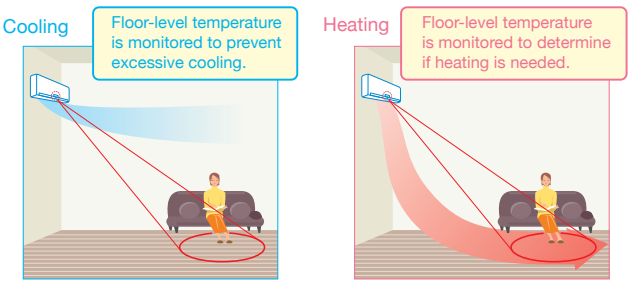

"I Feel" Control

The "I Feel" fuzzy-logic control memorises the most desirable temperature setting. If the "TOO WARM" or "TOO COOL" button on the remote controller is pressed, the system adds the choice to the control memory and adjusts the temperature so that the most comfortable temperature is provided. That temperature setting is used the next time the unit is turned on.

Area Temperature Monitor

The "i-see Sensor" monitors the whole room in sections and directs the airflow to areas of the room where the temperature does not match the temperature setting. (When cooling the room, if the middle of the room is detected to be hotter, more airflow is directed towards it.) This eliminates unnecessary heating /cooling and contributes to lower electricity costs.

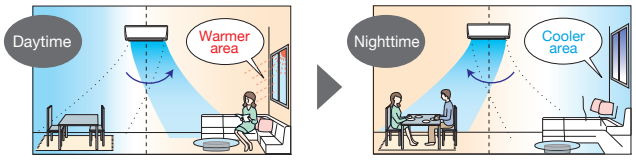

Econo Cool Energy-saving Feature

"Econo Cool" is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 2°C without any loss in comfort, thereby realising a 20% gain in energy efficiency. (Function only available during manual cooling operation.)

	Conventional	Econo Cool
Ambient temperature	35°C	35°C
Set temperature	25°C	27°C
Perceived temperature	30°C	**29.3°C**

Econo Cool mode
A comfortable room environment is maintained even when setting the temperature 2°C higher than the conventional cooling mode.

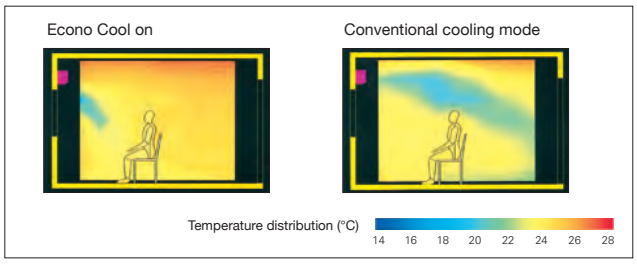

Potentially Demand Response Capable

Based on connection of a demand response enabling device (DRED) via DRED interface DRC-101A, Demand Response Mode is activated in response to signals sent from the electric power company at times when it is necessary to reduce peak demand.

* Only the models with VAD are potentially demand response capable units.

Attractive

Pure White

Pure white is adopted for the unit colour; white expressing the essence of cleanliness and easily matching virtually all interior décor.

Auto Vane

The vane closes automatically when the air conditioner is not running, concealing the air outlet and creating a flat surface that is aesthetically appealing.

Air Quality

Plasma Duo

Units are equipped with a pre-filter and two special filters that perform plasma air cleaning and plasma purification functions (Plasma Duo). The plasma system removes bad odors and bacterial particulates of micron- and nanometre-size from the air.

Air Cleaning Filter

The filter is charged with static electricity, enabling it to attract and capture dust particulates that regular filters don't.

Fresh-air Intake

Indoor air quality is enhanced by the direct intake of fresh exterior air.

Anti-allergy Enzyme Filter

The anti-allergy enzyme filter works to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter.

Electrostatic Anti-allergy Enzyme Filter

This function utilises both the air cleaning filter and anti-allergy enzyme filter.

Catechin Filter

Catechin is a bioflavonoid by-product of green tea with both antiviral and antioxidant qualities. It also has an excellent deodorising effect, which is why Mitsubishi Electric uses the compound in its air conditioner filters. In addition to improving air quality, it prevents the spreading of bacteria and viruses throughout the room. Easily removed for cleaning and maintenance, when the filter is washed regularly the deodorising action is rated to last more than 10 years.

Nano Platinum Filter

The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodorise the circulating air. Better dust collection than conventional filters is also ensured.

Air Distribution

Horizontal Vane

The air outlet vane swings up and down so that the airflow is spread evenly throughout the room.

High Ceiling Mode

In the case of rooms with high ceilings, the outlet-air volume can be increased to ensure that air is circulated all the way to the floor.

Vertical Vane

The air outlet vane swings from side to side so that the airflow reaches every part of the room.

Auto Fan Speed Mode

The airflow speed mode adjusts the fan speed of the indoor unit automatically according to the present room conditions.

Wide and Long Airflow

The wide and long airflow function is especially beneficial for large spaces, helping to ensure that air is well circulated and reaches every corner of the room.

Wide Airflow

This unique airflow system distributes air horizontally over a wide-ranging 150° in heating mode and 100° in cooling mode. Simply press the Wide Swing icon on the remote controller to select the desired airflow from seven different patterns.



Long Airflow

Use this function to ensure that the airflow circulates to areas far across the room. Press the Long Airflow icon on the remote controller to extend reach up to as far as 12 metres from the unit.



Functions | 02

Convenience

On/Off Operation Timer

Use the remote controller to set the times for the air conditioner to turn on/off.

"i save" Mode

"i save" is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting. Using this function contributes to comfortable waste-free operation, realising the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

Pictured: MFZ Series remote controller

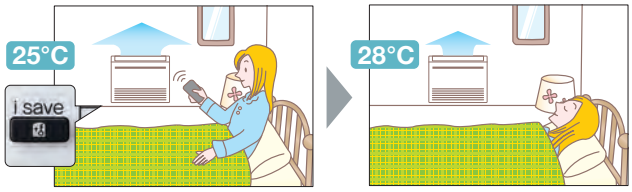

Auto Changeover

The air conditioner automatically switches between heating and cooling modes to maintain the desired temperature.

Low-temperature Cooling

Intelligent fan speed control in the outdoor unit ensures optimum performance even when the outside temperature is low.

Auto Restart

Especially useful at the time of power outages, the unit turns back on automatically when power is restored.

Low-noise Operation (Outdoor Unit)

System operation can be adjusted to prioritise less noise from the outdoor unit over air conditioning performance.

Ampere Limit Adjustment

Dipswitch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs. *Maximum capacity is lowered with the use of this function.

Dipswitch setting (board for MXZ-5)



SW2	Ampere limit
	10.5A
	15.5A
	Full (default setting)

*MXZ-5

Operation Lock

To accommodate specific-use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service.

Dipswitch setting (board for MXZ-5)



System Control

PAR-31MAA Control

Units are compatible for use with the PAR-31MAA remote controller, which has a variety of management functions including a weekly timer.

System Group Control

The same remote controller is capable of controlling the operational status of up to 16 refrigerant systems.

M-NET Connection

Units can be connected to MELANS system controllers (M-NET controllers) such as the AG-150A.

COMPO (Simultaneous Multi-unit Operation)

Multiple indoor units can be connected to a single outdoor unit. (Depending on the unit combination, connection of up to four units is possible; however, all indoor units must operate at the same settings.)

MXZ Connection

Connection to the MXZ multi-split outdoor unit is possible.

Wi-Fi Interface

Interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.

Installation

Cleaning-free Pipe Reuse

The application of pipe reuse technology such as Mitsubishi Electric's original hard alkyl benzene oil makes it possible to reuse the same piping, thereby allowing cleaning-free renewal of air conditioning systems that use R22 refrigerant.

Drain Pump

A built-in drain pump enables drain piping to be raised.

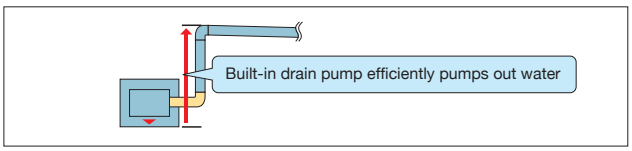

Flare Connection

Flare connection to cooling pipe work is possible.

Wiring/Piping Correction Function*

The push of a single button is all that is required to confirm that piping and wiring are properly connected. Corrections are made automatically if a wiring error is detected, eliminating the need for complicated wiring confirmation work when expanding the number of rooms served.

*This function cannot be used when the outdoor temperature is below 0°C.
The correction process requires 10–15 minutes, and only works when the unit is set to the cooling mode.

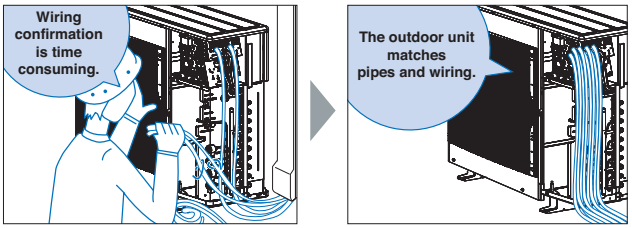

Maintenance

Quick Clean Body

The cover panel can be quickly removed for washing and the airflow vents can be opened without any special tools, making it easy to clean the inside of the air conditioner in minutes. Periodic cleaning of the air conditioner is recommended to maintain optimum operating efficiency and energy savings.

Self-diagnostic Function (Check Code Display)

Check codes are displayed on the remote controller or the operation indicator to inform the user of malfunctions detected.

Failure Recall Function

Operation failures are recorded, allowing confirmation when needed.

FEATURES

Category		Icon	M SERIES																				
		Combination: Indoor unit	MSZ-FB25/35/50VA							MSZ-EF22/25/35/42/50VE							MSZ-GE22/25/35/42/50/60/71/80VAD						
		Combination: Outdoor unit	MUZ -FB	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B	MUZ -EF	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B	MUZ -GE	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B
Technology		DC Inverter	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Joint Lap DC Motor	●	●	●	71				●	●	●	71				●	●	●	71			
		Magnetic Flux Vector Sine Wave Drive							●							●							●
		Reluctance DC Rotary Compressor				80	●	●					80	●	●					80	●	●	
		Highly Efficient DC Scroll Compressor							●							●							●
		Rare Earth Magnet Rotor (Compressor)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●*1	●	●	●	●	●	●
		DC Fan Motor	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Vector-Wave Eco Inverter							●							●							●
		PAM (Pulse Amplitude Modulation)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Power Receiver and Twin LEV Control			●	●	●	●				●	●	●	●				●	●	●	●	
		Grooved Piping	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Functions	Energy Saving	Felt Temperature Control (i-see Sensor)	●	●	●	●	●	●	●														
		Area Temperature Monitor	●	●	●	●	●	●	●														
		Econo Cool Energy-saving Feature	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		'I Feel' Control																					
		Potentially Demand Response Capable															Optional (25-80)						
		Demand Function							Optional							Optional							Optional
	Attractive	Pure White	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Auto Vane	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Air Quality	Plasma Duo	●	●	●	●	●	●	●														
		Air-cleaning Filter																					
		Fresh-air Intake																					
		Anti-allergy Enzyme Filter															●	●	●	●	●	●	●
		Electrostatic Anti-allergy Enzyme Filter															●		●	●	●	●	●
		High-efficiency Filter																					
		Catechin Filter															22-50	22-50	22-50	22-50	22-50	22-50	22-50
		Nano Platinum Filter								●	●	●	●	●	●	●	60-80			60/71	60/71	60/71	60-80
		Oil Mist Filter																					
		Long-life Filter																					
		Filter Check Signal																					
	Air Distribution	Horizontal Vane	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Vertical Vane	●	●	●	●	●	●	●								60/71/80			60/71	60/71	60/71	60/71
		High Ceiling Mode																					
		Low Ceiling Mode																					
		Auto Fan Speed Mode	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Wide and Long Airflow															60/71/80			60/71	60/71	60/71	60/71
	Convenience	On/Off Operation Timer	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Weekly Timer								●	●	●	●	●	●	●	60-80			60/71	60/71	60/71	60-80
		"i save" Mode								●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Auto Changeover	●	●*2	●*2	●*2	●*2	●*2	●*2	●	●*2	●*2	●*2	●*2	●*2	●*2	●	●*2	●*2	●*2	●*2	●*2	●*2
		Auto Restart	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Low-temperature Cooling	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Low-noise Operation (Outdoor Unit)		●	●	●	●	●	●		●	●	●	●	●	●		●	●	●	●	●	●
		Ampere Limit Adjustment				80	●	●	●				80	●	●	●				80	●	●	●
		Operation Lock		●	●	●	●	●	●		●	●	●	●	●	●		●	●	●	●	●	●
		Rotation, Back-up and 2nd Stage Cut-in Functions																					
	System Control	PAR-31MAA Control	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
		System Group Control	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
		M-NET Connection	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
		COMPO																					
		MXZ Connection		●	●	●	●	●	●		●	●	●	●	●	●		22-50	22-50	22-60 (71) 22-71 (80)	22-60	●	●
	Installation	Cleaning-free Pipe Reuse	●	●	●	●	●	●		●	●	●	●	●	●		●	●	●	●	●	●	
		Reuse of Existing Wiring																					
		Wiring/Piping Correction Function		●	●	●	●	●			●	●	●	●	●			●	●	●	●	●	
		Drain Pump																					
		Pump Down Switch																					
		Flare Connection	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Maintenance	Quick Clean Body	●	●	●	●	●	●	●								●	●	●	●	●	●	●
		Self-Diagnosis Function (Check Code Display)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		Failure Recall Function	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

*1: except for GE25VA(D) *2: When multiple indoor units connected to an MXZ outdoor unit are running at the same time, simultaneous cooling and heating is not possible.

• The figures listed in the table are "only when combined with an outdoor unit with the appropriate capacity range".
• Optional: Separate parts must be purchased.

M SERIES							S SERIES																					
MFZ-KJ25/35/50VA							SLZ-KA25/35/50VAQ							SLZ-KA25/35/50VAL							SEZ-KD25/35/50/60/71VAQ						
MUFZ -KJ	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B	SUZ -KA	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B	SUZ -KA	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B	SUZ -KA	MXZ -2D	MXZ -3D	MXZ -4D	MXZ -5D	MXZ -6D	MXZ -8B
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	71				●	●	●	71				●	●	●	71				●	●	●	71			
						●							●							●							●
			80	●	●					80	●	●					80	●	●					80	●	●	
						●							●							●							●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
						●							●							●							●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		●	●	●	●				●	●	●	●				●	●	●	●				●	●	●	●	
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●																					
						Optional							Optional							Optional							Optional
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
																					●	●	●	●	●	●	●
							●	●	●	●	●	●	●	●	●	●	●	●	●	●							
●	●	●	●	●	●	●																					
●	●	●	●	●	●	●																					
							●	●	●	●	●	●	●	●	●	●	●	●	●	●							
							●	●	●	●	●	●	●								●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
●	●	●	●	●	●	●															●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
							●														●						
●	●	●	●	●	●	●																					
●	●*2	●*2	●*2	●*2	●*2	●*2	●	●*2	●*2	●*2	●*2	●*2	●*2	●	●*2	●*2	●*2	●*2	●*2	●*2	●	●*2	●*2	●*2	●*2	●*2	●*2
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●		●	●	●	●	●	●		●	●	●	●	●	●		●	●	●	●	●	●
			80	●	●	●				80	●	●	●				80	●	●	●				80	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●
							●														●						
Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
	25/35	●	●	●	●	●		25/35	●	●	●	●	●		25/35	●	●	●	●	●		25/35	25-50	25-60 (71) 25-71 (80)	●	●	●
●	●	●	●	●	●			●	●	●	●	●			●	●	●	●	●			●	●	●	●	●	
	●	●	●	●	●			●	●	●	●	●			●	●	●	●	●			●	●	●	●	●	
							●	●	●	●	●	●	●	●	●	●	●	●	●	●	Optional	Optional	Optional	Optional	Optional	Optional	Optional
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

New MA remote controller PAR-31MAA

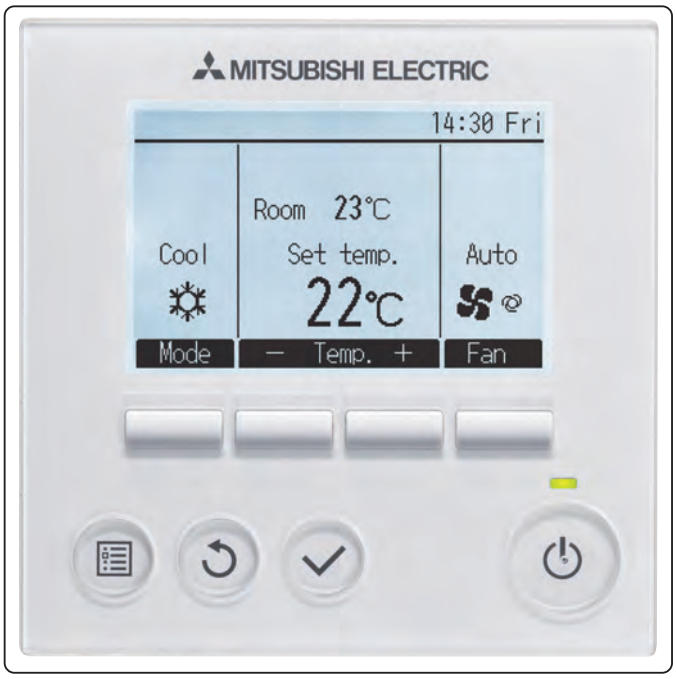

- **Backlit LCD (Liquid Crystal Display)**
  Large, easy-to-see display
  Full-dot LCD display with large characters for easy viewing
  Contrast also adjustable
- **Auto Return**
  Function to return the set temperature to the originally preset temperature after certain amount of time
  Auto return can be set respectively for cooling operation and for heating operation.
  Time can be set to a value from 30 and 120 in 10-minute increments.
- **Night Setback**
  To prevent indoor dew or excessive temperature rise, this control starts heating operation when the control object group is stopped and the room temperature drops below the preset lower limit temperature. Also, this control starts cooling operation when the control object group is stopped and the room temperature rises above the preset upper limit temperature.
- **Dimensions:** 120(W) x 120(H) x 19(D) mm

Functions

[Basic Functions]

▪ ON/OFF ▪ Operation mode switching ▪ Room temperature setting/display ▪ Fan speed setting
▪ Vane setting ▪ Louver setting ▪ Clock setting/display ▪ Filter information display

[New Functions]

▪ Set temperature can be set by 0.5°C increment.(City Multi and Mr.Slim)
▪ Room temperature can be shown by 0.5°C increment.(City Multi and Mr.Slim)
▪ Dual set temperature available* (City Multi)

*Note: Dual set temperature is only available with City Multi new indoor units that have dual set temperature capabilities.

[Advanced Functions]

Display mode switching	The main display can be displayed in two different modes: "Full" and "Basic".
Error information	Error code, error unit, unit address, unit model, serial number, contact information (dealer's phone number) can be displayed. * The unit model, serial number, and contact information need to be registered in advance to be displayed. * The unit address may not be displayed depending on the error type.
Ventilation equipment control	Interlock settings and interlock operation settings for Lossnay units can be made. OFF/High/Low can be switched.
High power Mr. Slim only	The units operate at higher-than-normal capacity for up to 30 minutes.
Auto descending panel	The automatic descending panel can be operated. * Valid only for the indoor units that are compatible with this function.
Timer	On/Off timer: The unit automatically turns on or off at the preset time. • Time can be set in 5-minute increments. • It is possible to set only the time when the unit turns on or when the unit turns off. Auto-Off timer: The unit automatically stops after the preset time has elapsed. • Time can be set to a value from 30 to 240 in 10-minute increments.
Weekly timer	ON/OFF and temperature setting can be scheduled for each day. • Up to eight operation patterns can be set for each day. • Time can be set in 5-minute increments. * Not valid when the On/Off timer is enabled.
OU silent mode Mr. Slim only	It´s available to set the time periods in which priority is given to quiet operation of outdoor units over temperature control. • Start/stop time can be set in 5-minute increments. • Select the desired silent level from "Normal", "Middle", and "Quiet".
Energy saving Mr. Slim only	The start/stop times to operate the units in the energy-save mode for each day of the week, and the energy-saving rate can be set. • Up to four energy-save operation patterns can be set for each day. • Time can be set in 5-minute increments. • Energy-saving rate can be set to a value from 0% and 50 to 90% in 10% increments.
Operation lock	Settings including ON/OFF, Operation mode, Set temp. and Vane can be locked.
Temperature range restriction	The lower limit and the upper limit of the settable temperature in each operation mode can be limited.
Password	Administrator password (required for schedule setting) and Maintenance password (required for test run and function setting) can be set.
Language selection	Language to be displayed on the screen can be selected from eight languages: English, French, German, Spanish, Italian, Portuguese, Swedish, and Russian.
Contrast	Screen contrast can be adjusted.
Manual vane angle	The vane angle can be set to a fixed position. * Valid only for the indoor units that are compatible with this function.

F SERIES

The new F Series line-up is engineered for superb harmony between high energy-efficiency and silence. The i-see Sensor, Plasma Duo and other superb new functions raise the comfort level to even greater heights.

Plasma Duo Filter Systems

Besides a pre-filter, the unit is also mounted with two plasma air purifying functions. These functions are engineered to zap air dirt particles from micron to nano-size in scale.

[Effective range]

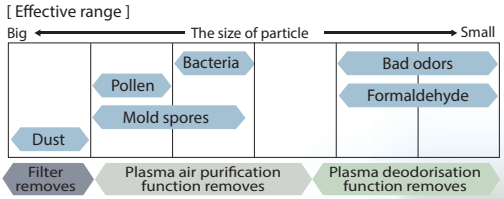

The plasma electrode unit is attached inside this hole.

Plasma Electrode Unit

A plasma electrode unit is installed inside the product. Electro-discharge is used to generate ozone & plasma. The combination of ozone & plasma and two special filters creates a dynamic plasma air cleaning function.

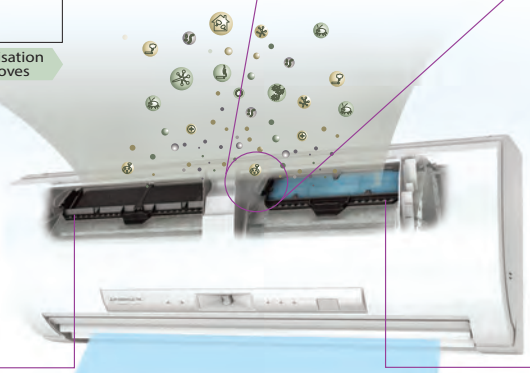

Plasma Deodorisation

Deodorising speed approximately doubled (compared to FA)



❶ Plasma electrode unit produces ozone
❷ Particles of odor-releasing substances are absorbed
❸ Particles of odor-releasing substances are decomposed by ozone

Plasma Air Purification



❶ Plasma electrode unit produces plasma
❷ Small particles are charged to negative by plasma
❸ Small particles charged to negative are collected to the positive side of the electret filter and neutralised by the enzymes

Mold Fighter

The MSZ-FB is equipped with a "Mold Fighter" function designed to suppress the growth of the spore of mold. The ozone generated in the plasma electrode unit attacks the mold spores, reducing mold growth speed by about 20%.

n Mold Fighter mechanism (40min)

Step 1 (15min)
After cooling operation, plasma electrode unit fills the inside of indoor unit with ozone (O_3).



Step 2 (25min)
The heat exchanger is dried using the fan mode.



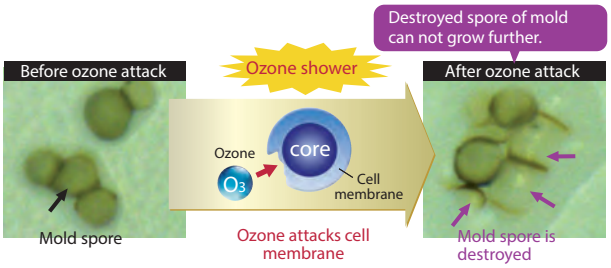

What is "Ozone"?

Ozone (O_3) is a very unstable molecule. It is resolved gradually and naturally into oxygen (O_2). During resolving, the "Nascent oxygen (O)" is produced. The nascent oxygen strongly oxidises the organic or inorganic matter, which produces the oxidising ability to sterilise and deodorise.

$$O_2 + \text{⚡} \rightarrow O_3 \rightarrow O_2 + (O)$$

Oxygen — High voltage — Ozone — Oxygen — Nascent oxygen

The consistency of ozone during ozone showering is at an acceptable level

- Inside of indoor unit 0.1ppm
  → Under the upper limit of an acceptable range of ozone gas consistency in a working environment (safety limit advised by Japan Society for Occupational Health)
- In the room 0.01ppm or less
  → Under the averaged consistency of ozone in coastal and forest areas.

High Energy Efficiency

With the latest inverter technology, energy efficiency is improved by about 13% in cooling operation and heating operation from the previous model "FA"(25 class). This contributes to further reductions in product power consumption.

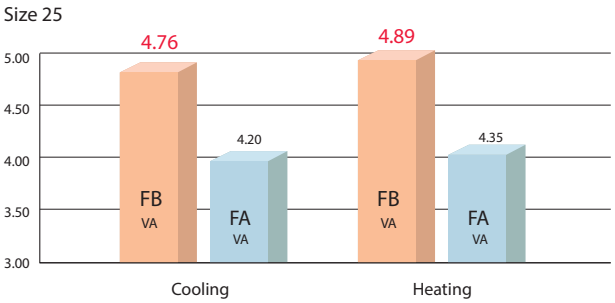

KEY TECHNOLOGY

Rare Earth Magnet Rotor for Compressor

Our unique motor offers high density and high magnetic force leading to high efficiency. And, what's more, the magnet for the compressor's rotor is changed from the current ferrite magnet to the rare earth magnet which has the triple the residual magnetic flux density of the ferrite magnet.

Rare earth magnet (for MSZ-FB)

Samarium Magnet Rotor for the DC fan motor of Outdoor Units

The magnet for the rotor has been changed from ferrite to samarium which has the more powerful force. Additionally, the shape of the magnet is cut to the optimum shape for higher efficiency.

Quiet Operation

A bigger line flow fan is attached in the FB model, which enables air conditioning capacity to be retained with fewer motor revolutions and operation noise to be reduced.

		MSZ-FB	MSZ-FA
25 VA	Cooling	1dB less 20dB	21dB
	Heating	1dB less 20dB	21dB
35 VA	Cooling	2dB less 20dB	22dB
	Heating	1dB less 21dB	22dB

From the side of MSZ-FB



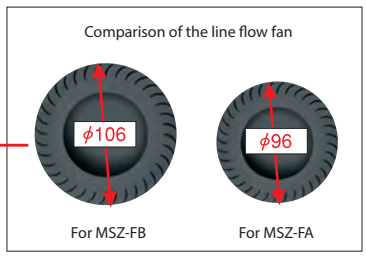

i-see Sensor

The "i-see Sensor" automatically moves from side to side, searching floor temperature over a wide area of 150°.

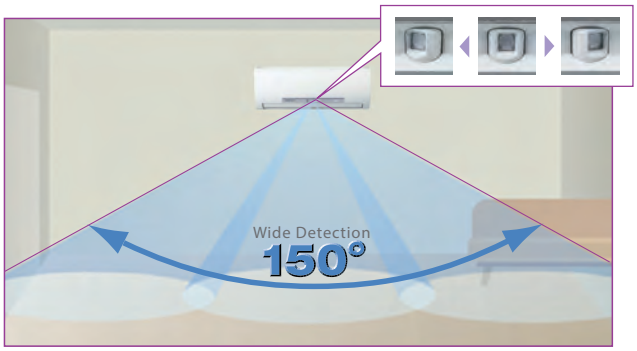

Conventional air conditioners control indoor temperature by using only the temperature of the intake air at the top of the room. As a result, the floor level temperature, which has a strong effect on the temperature that people feel, tends to be overlooked. i-see Sensor detects the floor temperature to ensure comfort in the living areas.

At Cooling



Cold air tends to sink to foot level, which is often the cause of over chilling. The i-see Sensor detects this foot-level temperature and adjusts the air outlet temperature to prevent over chilling.

At Heating



Warm air tends to rise up from the foot level, which often prevents that zone from warming up. The i-see Sensor detects this foot-level temperature and adjusts air outlet flow to prevent deficient warming.

Quick Clean

The easily detachable front panel is a snap to wash, and the airflow vents can be opened without any special tools for quick cleaning inside the air conditioner. It is recommended that the air conditioner be cleaned regularly, to increase operating efficiency and energy savings alike.

The quick clean kit is easily connected to household vacuum cleaners*1

Exclusive Quick Clean Kit (option)

Quick clean design slashes your electric bill by approx. 30%*2

*1: Wearing gloves is highly recommended when cleaning the heat exchanger. Touching it with bare hands may cause injury.
*2: Based on an in-house comparison of electricity costs with the unit operating at the same temperature setting with and without 8g of dirt on the fan.

R410A

DC Inverter

HEAT PUMP

Cleaning-free, pipe reuse

Plasma Duo Filter Systems

i-see Sensor

MSZ-FB SERIES

Indoor Unit

Outdoor Unit

MUZ-FB25VA

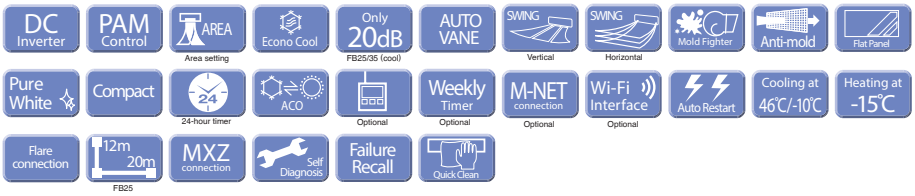

Remote Controller

Specifications (Wall-mounted Model)

Type				Inverter Heat Pump (R410A)		
Model Name				MSZ-FB25VA	MSZ-FB35VA	MSZ-FB50VA
Indoor Unit				MSZ-FB25VA	MSZ-FB35VA	MSZ-FB50VA
Outdoor Unit				MUZ-FB25VA	N/A	N/A
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply		
Cooling	Capacity [Min-Rated-Max]		kW	1.1 - 2.5 - 3.5	–	–
	Total Input [Min-Rated-Max]		kW	0.260 - 0.525 - 0.970	–	–
	AEER/EER			4.53 / 4.76	–	–
		Star Rating		4.5	–	–
	Running Current [Rated]		A	2.6	–	–
	Sound Pressure Level	IN [Lo-Mid-Hi-SHi*]	dB(A)	20 - 29 - 36 - 42	20 - 29 - 36 - 43	29 - 39 - 45 - 52
		OUT (PWL)	dB(A)	46 (59)	–	–
	Air Volume (IN) [Lo-SHi*]		L/S	77 - 187	77 - 195	105 - 247
Heating	Capacity [Min-Rated-Max]		kW	1.5 - 3.2 - 5.5	–	–
	Total Input [Min-Rated-Max]		kW	0.480 - 0.655 - 1.900	–	–
	ACOP/COP			4.69 / 4.89	–	–
		Energy Rating		5.0	–	–
	Running Current [Rated]		A	3.1	–	–
	Sound Pressure Level	IN [Lo-Mid-Hi-SHi*]	dB(A)	20 - 29 - 36 - 43	21 - 29 - 36 - 44	27 - 37 - 43 - 50
		OUT (PWL)	dB(A)	46 (59)	–	–
	Air Volume (IN) [Lo-SHi*]		L/S	75 - 202	78 - 208	92 - 247
Starting Current			A	3.1	–	–
Max. Running Current			A	10	–	–
Indoor Unit	Input [Rated] (Cooling/Heating)		W	25 / 30	27 / 32	60 / 60
	Dimensions [HxWxD]		mm	295 x 798 x 257		
	Weight		kg	12		
Outdoor Unit	Dimensions [HxWxD]		mm	550 x 800 x 285	–	–
	Weight		kg	36	–	–
	Breaker Size		A	10	–	–
Ext. Piping	Diameter (Gas/Liquid)		mm	9.52 / 6.35	–	–
	Max. Length/Height		m	20 / 12	–	–
Guaranteed Operating Range [Outdoor]		Cooling	℃	-10 ~ 46	–	–
		Heating	℃	-15 ~ 24	–	–

*SHi = Super High
FB35/50: Only for MXZ connection

MSZ-E SERIES

Developed to complement modern interior room décor, MSZ-E Series is available in three colours specially chosen to blend in naturally wherever installed.

Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.

High Energy Savings Achieved for Entire Range of Series

DC Inverter

All models in the series have achieved the top energy efficiency in the industry. For home use, such as in bedrooms and living rooms, to light commercial use, such as in offices, our air conditioners are contributing to reduced energy consumption across a wide range.

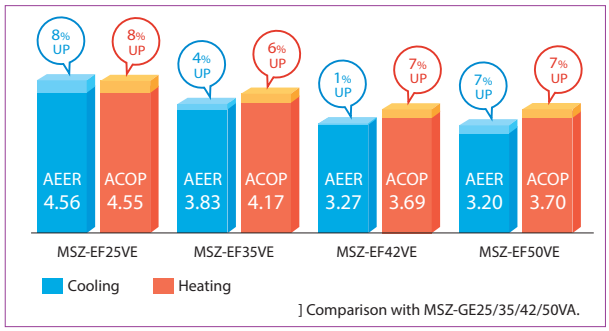

] Comparison with MSZ-GE25/35/42/50VA.

Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Quiet Mode" fan speed setting provides super-quiet operation as low as 21dB for EF22 / 25 / 35 models. This unique feature makes the MSZ-E series ideal for use in any situation.

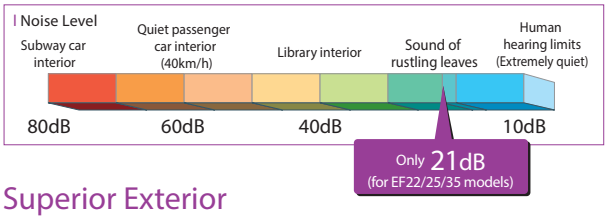

Superior Exterior and Operating Design Concept

The indoor unit keeps its amazingly thin form even during operation. The only physical change notable is the movement of the variable vent. As a result, a slim attractive look is maintained.

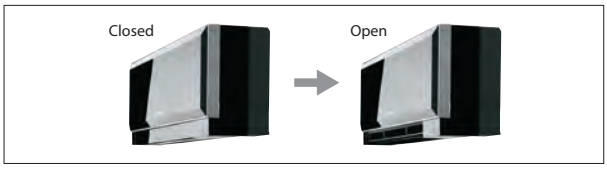

Nano Platinum Filter

Nano Platinum

This filter incorporates nanometre-sized platinum-ceramic particles that generate stable antibacterial and deodourising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Nano Platinum Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.

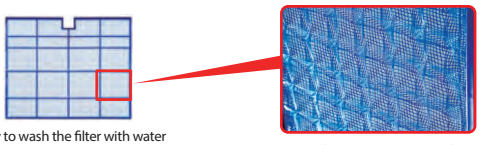

] It is okay to wash the filter with water (air-cleaning effect is maintained)

3D surface (Waved surface)

Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

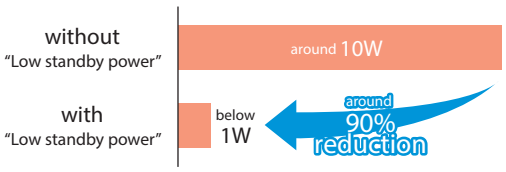

R410A

DC Inverter

HEAT PUMP

Cleaning-free, pipe reuse

MSZ-EF SERIES

Indoor Unit

Outdoor Unit

MUZ-EF25/35/42VE

MUZ-EF50VE

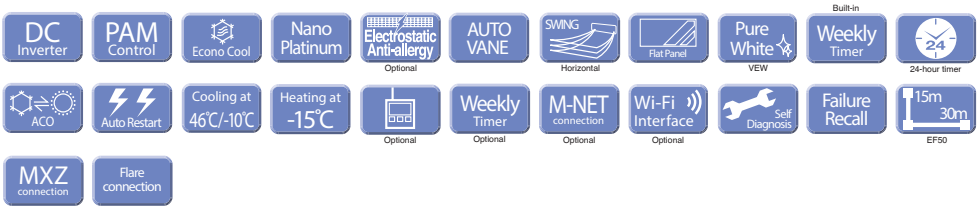

Remote Controller

Specifications (Wall-mounted Model)

Type				Inverter Heat Pump (R410A)				
Model Name				MSZ-EF22VEW/B/S	MSZ-EF25VEW/B/S	MSZ-EF35VEW/B/S	MSZ-EF42VEW/B/S	MSZ-EF50VEW/B/S
Indoor Unit				MSZ-EF22VEW/B/S	MSZ-EF25VEW/B/S	MSZ-EF35VEW/B/S	MSZ-EF42VEW/B/S	MSZ-EF50VEW/B/S
Outdoor Unit				N/A	MUZ-EF25VE	MUZ-EF35VE	MUZ-EF42VE	MUZ-EF50VE
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply				
Cooling	Capacity [Min-Rated-Max]		kW	–	1.2 - 2.5 - 3.4	1.4 - 3.5 - 4.0	0.9 - 4.2 - 4.6	1.4 - 5.0 - 5.4
	Total Input [Min-Rated-Max]		kW	–	0.240 - 0.545 - 1.150	0.210 - 0.910 - 1.500	0.160 - 1.280 - 1.930	0.300 - 1.560 - 1.980
	AEER/EER			–	4.56 / 4.59	3.83 / 3.85	3.27 / 3.28	3.20 / 3.21
		Star Rating		–	4.5	3.0	2.0	1.5
	Running Current [Rated]		A	–	2.9	4.2	5.7	6.9
	Sound Pressure Level	IN [Quiet-Lo-Mid-Hi-SHi*]	dB(A)	21 - 23 - 29 - 36 - 42	21 - 23 - 29 - 36 - 42	21 - 24 - 29 - 36 - 42	28 - 31 - 35 - 39 - 42	30 - 33 - 36 - 40 - 43
		OUT (PWL)	dB(A)	–	47 (60)	49 (63)	50 (64)	52 (66)
	Air Volume (IN) [Quiet-SHi*]		L/S	67 - 175	67 - 175	67 - 175	97 - 172	97 - 183
Heating	Capacity [Min-Rated-Max]		kW	–	1.1 - 3.2 - 4.2	1.8 - 4.0 - 5.5	1.4 - 5.4 - 6.3	1.6 - 5.8 - 7.5
	Total Input [Min-Rated-Max]		kW	–	0.250 - 0.700 - 1.170	0.280 - 0.955 - 1.530	0.260 - 1.460 - 2.050	0.310 - 1.565 - 2.640
	ACOP/COP			–	4.55 / 4.57	4.17 / 4.19	3.69 / 3.70	3.70 / 3.71
		Star Rating		–	4.5	4.0	2.5	2.5
	Running Current [Rated]		A	–	3.5	4.4	6.5	7.0
	Sound Pressure Level	IN [Quiet-Lo-Mid-Hi-SHi*]	dB(A)	21 - 24 - 29 - 37 - 45	21 - 24 - 29 - 37 - 45	21 - 24 - 30 - 38 - 46	28 - 30 - 35 - 41 - 48	30 - 33 - 37 - 43 - 49
		OUT (PWL)	dB(A)	–	48 (60)	50 (63)	51 (64)	52 (66)
	Air Volume (IN) [Quiet-SHi*]		L/S	67 - 198	67 - 198	67 - 212	92 - 212	107 - 220
Starting Current			A	–	3.5	4.4	6.5	7.0
Max. Running Current			A	–	7.3	8.5	9.5	12.4
Indoor Unit	Input [Rated] (Cooling/Heating)		W	14 / 27	14 / 27	14 / 31	14 / 31	18 / 34
	Dimensions [HxWxD]		mm	299 x 895 x 195	299 x 895 x 195	299 x 895 x 195	299 x 895 x 195	299 x 895 x 195
	Weight		kg	11.5	11.5	11.5	11.5	11.5
Outdoor Unit	Dimensions [HxWxD]		mm	–	550 x 800 x 285	550 x 800 x 285	550 x 800 x 285	880 x 840 x 330
	Weight		kg	–	30	35	35	54
	Breaker Size		A	–	10	10	10	16
Ext. Piping	Diameter (Gas/Liquid)		mm	9.52 / 6.35	9.52 / 6.35	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35
	Max. Length/Height		m	–	20 /12	20 /12	20 / 12	30 / 15
Guaranteed Operating Range [Outdoor]		Cooling	℃	–	-10 ~ 46			
		Heating	℃	–	-15 ~ 24			

*SHi = Super High

Note : •The energy-saving potential of inverter air conditioners is not reflected in the star rating, as the current energy star rating scheme does not cover the determination of seasonal or part load efficiencies.
•MSZ-EF22VA is for MXZ connection only. (The indicated capacity is rated capacity if one unit is connected to MXZ.)
•MSZ-EF50 meets MEPS criteria at partial load.

MSZ-G SERIES

The standard model MSZ-G units provide excellent energy-savings and operation is impressively silent. A vast series line-up is ready to ensure comfortable room environments in response to your air conditioning needs.

Quiet Operation

Only 19dB

A "Quiet Mode" setting has been added to the fan speed settings, ensuring super-quiet operation below 20dB for model sizes 35 and under. Perfect for the bedroom; it's so quiet you'll check to see if it's on.





Comparison of minimum indoor SPL (dB)

Series (Fanspeed) \ Size	25		35		50		60		71		80	
	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
MSZ-GA/GB (Low)	21	21	22	22	32	30	32	32	33	33	33	33
	2dB Less	2dB Less	3dB Less	3dB Less	4dB Less	2dB Less	3dB Less	3dB Less	3dB Less	3dB Less	3dB Less	3dB Less
MSZ-GE (Quiet)	19	19	19	19	28	28	29	29	30	30	30	30

"i save" Mode

i save

"i save" is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice to immediately return to the previous temperature setting. Using this function contributes to energy savings when, for example, leaving the room or going to bed.

* Temperature can be preset to 10ºC when heating in the "i save" mode (except when connected to MXZ-8).

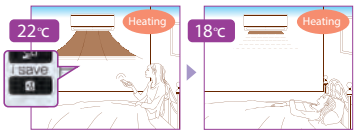

(60/71/80) (25/35/42/50)

High Energy Savings Achieved for Entire Range of Series

DC Inverter

All models in the series, from the low-capacity 25 to the high-capacity 80, have achieved the top energy efficiency in the industry. For home use, such as in bedrooms and living rooms, to light commercial use, such as in offices, our air conditioners are contributing to reduced energy consumption across a wide range.

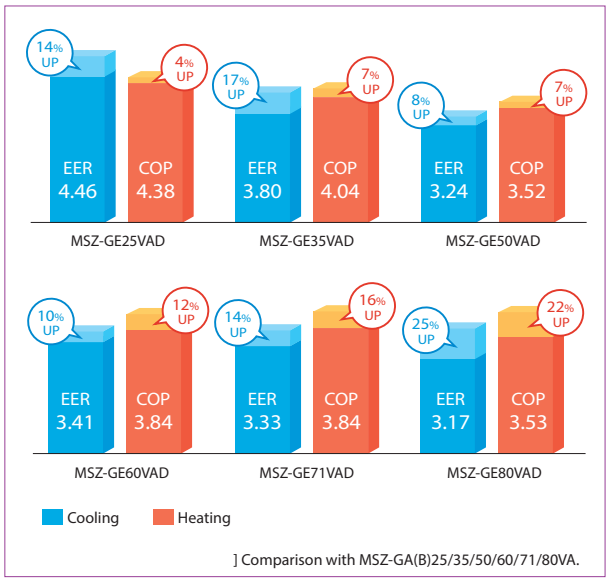

] Comparison with MSZ-GA(B)25/35/50/60/71/80VA.

Nano Platinum Filter (60/71/80)

Nano Platinum

This filter incorporates nanometre-sized platinum-ceramic particles that generate stable anti-bacterial and deodorising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the nano platinum filter of the MSZ-GE60/71/80 models better dust collection performance than conventional filters. The superior air-cleaning effectiveness increases room comfort yet another level.



*Filter can be washed with water (air-cleaning effect is maintained)

Potentially Demand Response Capable

Demand Response Capability

Based on connection of a demand response enabling device (DRED) via DRED interface DRC-101A, Demand Response Mode is activated in response to signals sent from the electric power company at times when it is necessary to reduce peak demand. (2.5kW–8.0kW)

* Only MSZ-G Series with model name MUZ-GE]]VAD/MSZ-GE]]VAD are potentially demand response capable units.

R410A

DC Inverter

HEAT PUMP

Cleaning-free, pipe reuse

MSZ-GE SERIES

Indoor Unit

Outdoor Unit

MUZ-GE25/35/42VAD

MUZ-GE50VAD

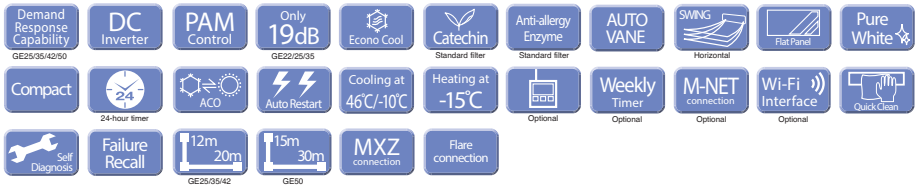

Remote Controller

Specifications (Wall-mounted Model)

Type				Inverter Heat Pump (R410A)				
Model Name				MSZ-GE22VAD	MSZ-GE25VAD	MSZ-GE35VAD	MSZ-GE42VAD	MSZ-GE50VAD
Indoor Unit				MSZ-GE22VAD	MSZ-GE25VAD	MSZ-GE35VAD	MSZ-GE42VAD	MSZ-GE50VAD
Outdoor Unit				N/A	MUZ-GE25VAD	MUZ-GE35VAD	MUZ-GE42VAD	MUZ-GE50VAD
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply				
Cooling	Capacity [Min-Rated-Max]		kW	–	1.1 - 2.5 - 3.5	1.1 - 3.5 - 4.0	0.9 - 4.2 - 4.8	1.4 - 4.8 - 5.4
	Total Input [Min-Rated-Max]		kW	–	0.205 - 0.560 - 1.145	0.205 - 0.920 - 1.430	0.160 - 1.260 - 1.940	0.320 - 1.480 - 2.060
	AEER/EER			–	4.21 / 4.46	3.67 / 3.80	3.25 / 3.33	3.17 / 3.24
		Star Rating		–	4.0	3.0	2.0	2.0
	Running Current [Rated]		A	–	2.9	4.4	5.8	6.8
	Sound Pressure Level	IN [Quiet-Lo-Mid-Hi-SHi*]	dB(A)	19 - 21 - 29 - 36 - 42	19 - 21 - 29 - 36 - 42	19 - 22 - 30 - 36 - 43	26 - 30 - 35 - 40 - 46	28 - 33 - 38 - 44 - 49
		OUT (PWL)	dB(A)	–	46 (58)	47 (61)	50 (62)	54 (69)
	Air Volume (IN) [Quiet-SHi*]		L/S	68 - 188	68 - 188	68 - 212	97 - 213	108 - 252
Heating	Capacity [Min-Rated-Max]		kW	–	1.3 - 3.2 - 4.1	1.6 - 4.0 - 5.3	1.4 - 5.4 - 6.0	1.4 - 5.8 - 7.2
	Total Input [Min-Rated-Max]		kW	–	0.255 - 0.730 - 1.200	0.340 - 0.990 - 1.680	0.270 - 1.540 - 2.040	0.320 - 1.650 - 2.490
	ACOP/COP			–	4.19 / 4.38	3.91 / 4.04	3.43 / 3.51	3.44 / 3.52
		Star Rating		–	4.0	3.5	2.5	2.5
	Running Current [Rated]		A	–	3.8	4.6	7.0	7.4
	Sound Pressure Level	IN [Quiet-Lo-Mid-Hi-SHi*]	dB(A)	19 - 21 - 29 - 36 - 42	19 - 21 - 29 - 36 - 42	19 - 22 - 30 - 36 - 43	26 - 30 - 35 - 40 - 46	28 - 33 - 37 - 43 - 48
		OUT (PWL)	dB(A)	–	48 (59)	48 (62)	51 (64)	56 (69)
	Air Volume (IN) [Quiet-SHi*]		L/S	68 - 192	68 - 192	68 - 192	97 - 218	108 - 242
Starting Current			A	–	3.8	4.6	7.0	7.4
Max. Running Current			A	–	7.4	8.6	10.0	13.0
Indoor Unit	Input [Rated] (Cooling/Heating)		W	22 / 23	22 / 23	29 / 23	29 / 30	43 / 39
	Dimensions [HxWxD]		mm	295 x 798 x 232	295 x 798 x 232	295 x 798 x 232	295 x 798 x 232	295 x 798 x 232
	Weight		kg	10	10	10	10	10
Outdoor Unit	Dimensions [HxWxD]		mm	–	550 x 800 x 285	550 x 800 x 285	550 x 800 x 285	850 x 840 x 330
	Weight		kg	–	30	33	36	54
	Breaker Size		A	–	10	10	10	16
Ext. Piping	Diameter (Gas/Liquid)		mm	9.52 / 6.35	9.52 / 6.35	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35
	Max. Length/Height		m	–	20 /12	20 /12	20 / 12	30 / 15
Guaranteed Operating Range [Outdoor]		Cooling	℃	–	-10 ~ 46			
		Heating	℃	–	-15 ~ 24			

*SHi = Super High

Note : •MUZ-GE]]VAD is potentially demand response capable unit. DRC-101A is required.
•MSZ-GE22VA(D) is for MXZ connection only. (The indicated capacity is rated capacity if one unit is connected to MXZ.)
•MSZ-GE50 meets MEPS criteria at partial load.

MSZ-GE SERIES

R410A

DC Inverter

HEAT PUMP

Cleaning-free, pipe reuse

Indoor Unit

Outdoor Unit

MUZ-GE60/71/80VAD

Remote Controller

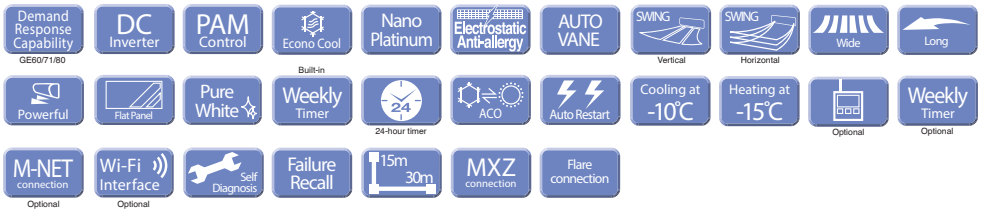

Specifications (Wall-mounted Model)

Type				Inverter Heat Pump (R410A)		
Model Name				MSZ-GE60VAD	MSZ-GE71VAD	MSZ-GE80VAD
Indoor Unit				MSZ-GE60VAD	MSZ-GE71VAD	MSZ-GE80VAD
Outdoor Unit				MUZ-GE60VAD	MUZ-GE71VAD	MUZ-GE80VAD
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply		
Cooling	Capacity [Min-Rated-Max]		kW	1.5 - 6.0 - 7.5	2.4 - 7.1 - 8.7	2.4 - 7.8 - 9.2
	Total Input [Min-Rated-Max]		kW	0.280 - 1.760 - 2.380	0.570 - 2.130 - 3.370	0.570 - 2.460 - 3.580
	AEER/EER			3.37 / 3.41	3.30 / 3.33	3.14 / 3.17
		Star Rating		2.5	2.0	2.0
	Running Current [Rated]		A	7.8	9.4	10.8
	Sound Pressure Level	IN [Quiet-Lo-Mid-Hi-SHi*]	dB(A)	29 - 37 - 41 - 45 - 49	30 - 37 - 41 - 45 - 49	30 - 37 - 41 - 45 - 49
		OUT (PWL)	dB(A)	55 (69)	55 (69)	55 (69)
	Air Volume (IN) [Quiet-SHi*]		L/S	163 - 305	162 - 297	162 - 297
Heating	Capacity [Min-Rated-Max]		kW	2.0 - 6.8 - 9.3	2.2 - 8.1 - 9.9	2.2 - 9.0 - 11.1
	Total Input [Min-Rated-Max]		kW	0.460 - 1.770 - 2.940	0.520 - 2.110 - 3.250	0.520 - 2.550 - 3.650
	ACOP/COP			3.80 / 3.84	3.80 / 3.84	3.50 / 3.53
		Star Rating		3.0	3.0	2.5
	Running Current [Rated]		A	7.8	9.5	11.2
	Sound Pressure Level	IN [Quiet-Lo-Mid-Hi-SHi*]	dB(A)	29 - 37 - 41 - 45 - 49	30 - 37 - 41 - 45 - 49	30 - 37 - 41 - 45 - 49
		OUT (PWL)	dB(A)	55 (69)	55 (69)	55 (69)
	Air Volume (IN) [Quiet-SHi*]		L/S	163 - 305	170 - 297	170 - 297
Starting Current			A	7.8	9.5	11.2
Max. Running Current			A	14.5	16.6	16.6
Indoor Unit	Input [Rated] (Cooling/Heating)		W	48 / 62	58 / 58	58 / 58
	Dimensions [HxWxD]		mm	325 x 1,100 x 238	325 x 1,100 x 238	325 x 1,100 x 238
	Weight		kg	16	16	16
Outdoor Unit	Dimensions [HxWxD]		mm	880 x 840 x 330	880 x 840 x 330	880 x 840 x 330
	Weight		kg	50	53	53
	Breaker Size		A	20	20	20
Ext. Piping	Diameter (Gas/Liquid)		mm	15.88 / 6.35	15.88 / 9.52	15.88 / 9.52
	Max. Length/Height		m	30 / 15	30 / 15	30 / 15
Guaranteed Operating Range [Outdoor]		Cooling	℃	-10 ~ 46		
		Heating	℃	-15 ~ 24		

*SHi = Super High
Note : •MUZ-GE]]VAD is potentially demand response capable unit. DRC-101A is required.
•MSZ-GE80 meets MEPS criteria at partial load.

MFZ SERIES

High Capacity, Energy Savings and a Design in Harmony with
Living Spaces Raise the Value of Your Room to the Next Level.

Simple, Flat Design

Uneven surfaces have been smoothed to provide a simple design with linear beauty, harmonised with all types of interiors.

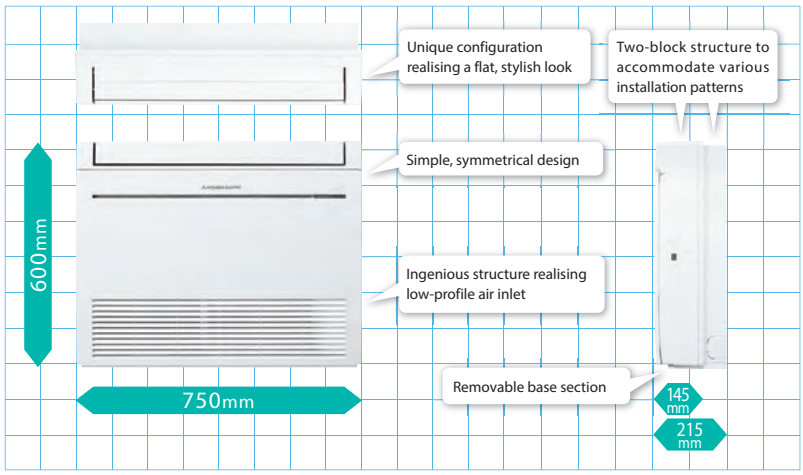

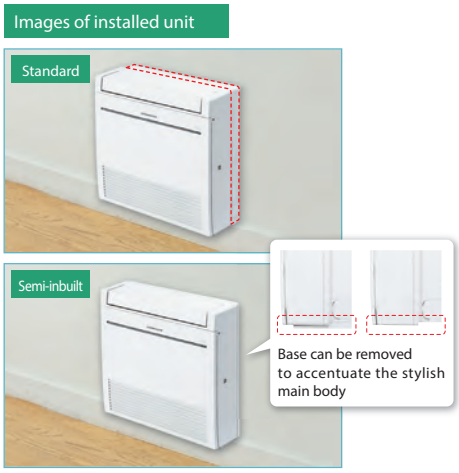

Multi-flow Vane

Three uniquely shaped vanes control the airflow and allow the freedom to customise comfort according to preferences.

Rapid heating

Warm air is blown out in a downward direction and then sucked back into the unit to quickly raise the temperature of the air being blown out.



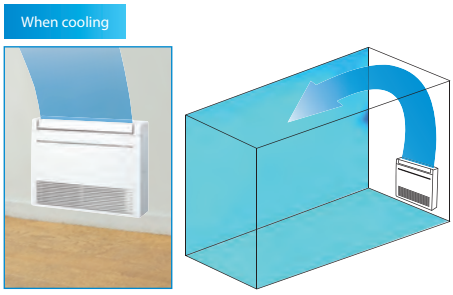

*The downward airflow is also possible as well as heating.

Excellent Energy-saving Performance

Compared with previous MFZ-KA models, the new MFZ-KJ has achieved much better energy-saving performance both in cooling (AEER) and heating (ACOP).

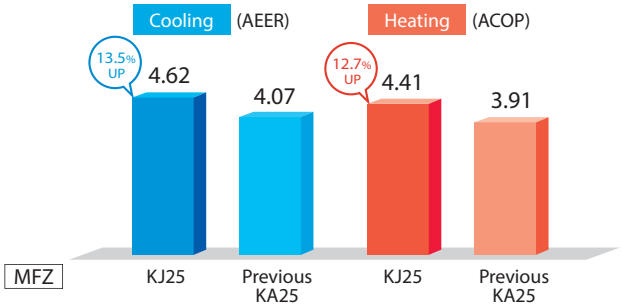

Built-in Weekly Timer (Introduced in response to market demand)

Temperature settings and On/Off control can be managed over a period of one week using the Weekly Timer. Up to eight setting patterns per calendar day are possible.

Trouble-free Installation and Maintenance

Using the original installation plate that comes as standard equipment, installation of the unit is made simple. Levelling adjusters are provided, preventing damage to the wall. Generous pipe length of 20–30 metres is provided, so there is no need to worry about distance to the outdoor unit. All units are equipped with an automatic self-diagnostics function as well. Simply access the trouble log recall mode for instant troubleshooting.

MFZ-KJ SERIES

R410A

DC Inverter

HEAT PUMP

Cleaning-free, pipe reuse

Indoor Unit

Outdoor Unit

MUFZ-KJ25/35VE

MUFZ-KJ50VE

Remote Controller

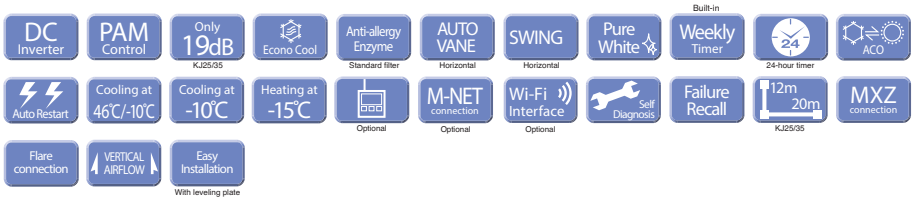

Specifications (Floor-standing Model)

Type				Inverter Heat Pump (R410A)		
Model Name				MFZ-KJ25VE	MFZ-KJ35VE	MFZ-KJ50VE
Indoor Unit				MFZ-KJ25VE	MFZ-KJ35VE	MFZ-KJ50VE
Outdoor Unit				MUFZ-KJ25VE	MUFZ-KJ35VE	MUFZ-KJ50VE
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply		
Cooling	Capacity [Min-Rated-Max]		kW	0.5 - 2.5 - 3.4	0.5 - 3.5 - 3.7	1.6 - 5.0 - 5.7
	Total Input [Min-Rated-Max]		kW	0.15 - 0.54 - 0.91	0.15 - 0.90 - 1.14	0.43 - 1.40 - 1.97
	AEER/EER			4.62 / 4.63	3.88 / 3.89	3.56 / 3.57
		Star Rating		5.0	3.0	2.5
	Running Current [Rated]		A	2.7	4.2	6.2
	Sound Pressure Level	IN [Quiet-SHi*]	dB(A)	20 - 39	20 - 39	27 - 44
		OUT (SPL/PWL)	dB(A)	46 / 59	47 / 60	49 / 63
	Air Volume (IN) [Quiet-SHi*]		L/S	65 - 82 - 98 - 118 - 137	65 - 82 - 98 - 118 - 137	93 - 112 - 133 - 155 - 177
Heating	Capacity [Min-Rated-Max]		kW	1.2 - 3.4 - 4.6	1.2 - 4.3 - 5.8	2.2 - 5.8 - 8.2
	Total Input [Min-Rated-Max]		kW	0.36 - 0.77 - 1.4	0.36 - 1.1 - 2.2	0.58 - 1.50 - 3.06
	ACOP/COP			4.41 / 4.42	3.90 / 3.91	3.86 / 3.87
		Energy Rating		4.0	3.0	3.0
	Running Current [Rated]		A	3.7	5.0	6.7
	Sound Pressure Level	IN [Quiet-SHi*]	dB(A)	19 - 41	19 - 41	29 - 50
		OUT (SPL/PWL)	dB(A)	51 / 62	51 / 63	52 / 63
	Air Volume (IN) [Quiet-SHi*]		m^3/min	65 - 85 - 103 - 128 - 162	65 - 85 - 103 - 128 - 162	100 - 123 - 157 - 193 - 233
Starting Current			A	3.6	5.1	7.1
Max. Running Current			A	9.4	9.4	14
Indoor Unit	Input [Rated] Cooling/Heating		W	13 / 16	13 / 16	21 / 38
	Dimensions [HxWxD]		mm	600 x 750 x 215	600 x 750 x 215	600 x 750 x 215
	Weight		kg	15	15	15
Outdoor Unit	Dimensions [HxWxD]		mm	550 x 800 x 285	550 x 800 x 285	880 x 840 x 330
	Weight		kg	37	37	55
	Breaker Size		A	10	10	16
Ext. Piping	Diameter (Gas/Liquid)		mm	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35
	Max. Length/Height		m	20 / 12	20 / 12	30 / 15
Guaranteed Operating Range [Outdoor]		Cooling	℃	-10 ~ 46	-10 ~ 46	-10 ~ 46
		Heating	℃	-15 ~ 24	-15 ~ 24	-15 ~ 24

* SHi = Super High

SLZ/SEZ SERIES

Our super-quiet compact indoor unit, with cutting-edge remote control.
Comfortable operation for the living room, bedroom and other living spaces.

Compact Design

Perfect for any room in the house. Choose between the compact SLZ cassette, which fits perfectly into a 2-metre-square ceiling panel, and the SEZ Series concealed-ceiling unit, which has a reduced installation space height requirement of only 270mm.



SLZ



SEZ-KD35/50

Impressively Quiet Operation

S Series units offer whisper-quiet operation at a hushed noise level of 23dB (SEZ-KD25/35), ensuring a calm and comfortable environment. Customisable to match any room interior, our S Series air conditioners are so quiet you'll check to see if they're on.

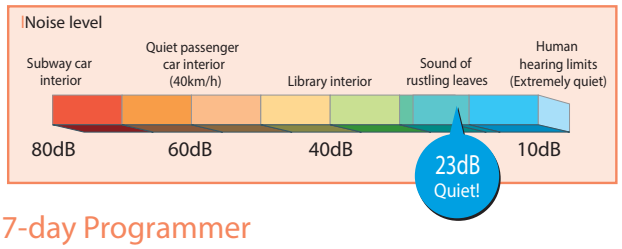

7-day Programmer

The Mitsubishi Electric new MA remote controller, supporting truly exceptional room comfort. Program the system with this weekly timer, inputting up to 8 patterns for each calendar day.

PAR-31MAA

<New functions>
- Limit the set temperature range.
- Auto off timer
- Operation lock
- Multi-language display
  (English, Spanish, Italian, German, French, Russian, Chinese, Japanese)

Energy-saving Operation

Boasting low energy consumption, SLZ/SEZ Series air conditioners are the key to fresh, cost-effective room comfort.

Air Cleaning Filter

This built-in filter removes dust and other particulates, keeping the air clean all the time. Maintenance is as simple as vacuuming. The long-life filter in SLZ Series air conditioners can be used for approximately 2,500 hours before requiring replacement.

SLZ-KA SERIES

R410A

DC Inverter

HEAT PUMP

Indoor Unit

Outdoor Unit

SUZ-KA25VA3

SUZ-KA50VA3

Remote Controller

*for SLZ-KA VAL

*optional
for SLZ-KA VAQ
(PAR-31MA)

*optional
for SLZ-KA VAQ
(PAC-YT52CRA)

Specifications (4-way Cassette Model)

Type				Inverter Heat Pump (R410A)		
Model Name				**SLZ-KA25VA**	**SLZ-KA35VA**	**SLZ-KA50VA**
Indoor Unit				SLZ-KA25VAQ(L)*	SLZ-KA35VAQ(L)*	SLZ-KA50VAQ(L)*
Outdoor Unit				SUZ-KA25VA3	N/A	SUZ-KA50VA3
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply		
Cooling	**Capacity [Min-Rated-Max]**		kW	0.9 - 2.3 - 3.2	3.5	1.1 - 4.2 - 5.2
	Total Input [Min-Rated-Max]		kW	0.25 - 0.60 - 1.00	–	0.49 - 1.27 - 2.13
	AEER/EER			3.65 / 3.83	–	3.23 / 3.31
		Star Rating		2.5	–	2.0
	Running Current [Rated]		A	2.9	–	5.8
	Sound Pressure Level	IN [Lo-Mid-Hi]	dB(A)	28 - 31 - 37	29 - 33 - 38	30 - 34 - 39
		OUT (PWL)	dB(A)	46 (59)	–	53 (68)
	Air Volume (IN) [Lo-Mid-Hi]		L/S	133 - 150 - 167	133 - 150 - 183	133 - 150 - 183
Heating	**Capacity [Min-Rated-Max]**		kW	0.9 - 3.1 - 4.5	4.0	0.9 - 4.5 - 6.5
	Total Input [Min-Rated-Max]		kW	0.17 - 0.82 - 1.36	–	0.39 - 1.37 - 3.36
	ACOP/COP			3.66 / 3.78	–	3.22 / 3.28
		Star Rating		3.0	–	1.5
	Running Current [Rated]		A	3.9	–	6.2
	Sound Pressure Level	IN [Lo-Mid-Hi]	dB(A)	28 - 31 - 37	29 - 33 - 38	30 - 34 - 39
		OUT (PWL)	dB(A)	46 (59)	–	55 (69)
	Air Volume (IN) [Lo-Mid-Hi]		L/S	133 - 150 - 167	133 - 150 - 183	133 - 150 - 183
Starting Current			A	3.65	–	6.75
Indoor Unit	**Input [Rated]**		W	75	85	85
	Dimensions [HxWxD]		mm	208 x 570 x 570	208 x 570 x 570	208 x 570 x 570
		Panel	mm	20 x 650 x 650	20 x 650 x 650	20 x 650 x 650
	Weight (Panel)		kg	16.5 (3)	16.5 (3)	16.5 (3)
Outdoor Unit	**Dimensions [HxWxD]**		mm	550 x 800 x 285	–	850 x 840 x 330
	Weight		kg	30	–	53
	Max. Running Current		A	8.16	–	16
	Breaker Size		A	10	–	20
Ext. Piping	**Diameter (Gas/Liquid)**		mm	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35
	Max. Length/Height		m	20 / 12	–	30 / 30
Guaranteed Operating Range [Outdoor]	Cooling		℃	-10 ~ 46	–	-15 ~ 43
	Heating		℃	-15 ~ 24	–	-15 ~ 24

* SLZ-KA VAL comes with a wireless remote controller.
Note : •Specification is subject to change without notice.
•SLZ-KA35: Only for MXZ connection
•SLZ-KA25 meets MEPS criteria at partial load.

R410A

DC Inverter

SEZ-KD SERIES

HEAT PUMP

Indoor Unit

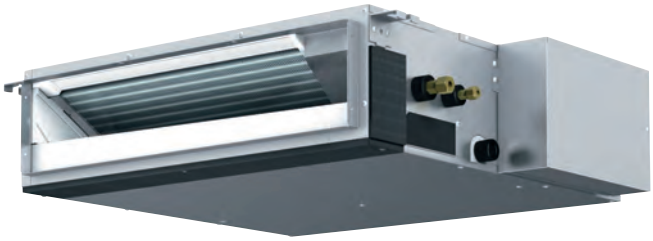

Outdoor Unit

SUZ-KA25VA3/35VA2

SUZ-KA50VA3

SUZ-KA60/71VA3

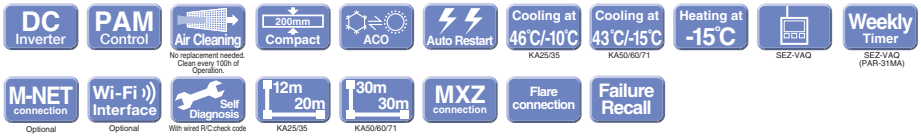

Remote Controller

*optional
for SEZ-KD VAQ
(PAC-YT52CRA)

*optional
for SEZ-KD VAQ
(PAR-31MA)

*for SEZ-KD VAL

Specifications (Ceiling-concealed Model)

Type				Inverter Heat Pump (R410A)				
Model Name				SEZ-KD25VA	SEZ-KD35VA	SEZ-KD50VA	SEZ-KD60VA	SEZ-KD71VA
Indoor Unit				SEZ-KD25VAQ(L)*	SEZ-KD35VAQ(L)*	SEZ-KD50VAQ(L)*	SEZ-KD60VAQ(L)*	SEZ-KD71VAQ(L)*
Outdoor Unit				SUZ-KA25VA3	SUZ-KA35VA2	SUZ-KA50VA3	SUZ-KA60VA3	SUZ-KA71VA3
Power Supply [V, Phase, Hz]				230V, Single, 50Hz, Outdoor unit power supply				
Cooling	**Capacity [Min-Rated-Max]**		kW	0.9 - 2.5 - 3.2	1.0 - 3.7 - 3.9	1.1 - 5.1 - 5.6	1.1 - 5.6 - 6.3	0.9 - 6.5 - 8.3
	Total Input [Min-Rated-Max]		kW	0.24 - 0.75 - 1.07	0.26 - 1.09 -1.35	0.51 - 1.64 - 2.33	0.50 - 1.77 - 2.52	2.06
	AEER/EER			3.21 / 3.33	3.31 / 3.39	3.05 / 3.11	3.11 / 3.16	3.10 / 3.16
	Running Current [Rated]		A	3.6	5.10	7.40	7.9	9.2
	Sound Pressure	IN [Lo-Mid-Hi]	dB(A)	23 - 26 - 30	23 - 28 - 33	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40
	Level	OUT (PWL)	dB(A)	46 (59)	47 (61)	53 (68)	55 (69)	
	Air Volume (IN) [Lo-Mid-Hi]		L/S	92 - 117 - 150	117 - 150 - 183	167 - 208 - 250	200 - 250 - 300	200 - 267 - 333
Heating	**Capacity [Min-Rated-Max]**		kW	0.9 - 3.0 - 4.5	0.9 - 4.2 - 5.0	1.1 - 6.4 - 7.2	0.9 - 7.4 - 8.0	0.9 - 8.1 - 10.4
	Total Input [Min-Rated-Max]		kW	0.26 - 0.83 - 1.35	0.24 - 1.13 - 1.52	0.47 - 1.81 - 3.45	0.32 - 2.05 - 2.69	2.18
	ACOP/COP			3.49 / 3.61	3.62 / 3.72	3.48 / 3.54	3.55 / 3.61	3.66 / 3.72
	Running Current [Rated]		A	4.0	5.20	8.2	9.1	9.70
	Sound Pressure	IN [Lo-Mid-Hi]	dB(A)	23 - 26 - 30	23 - 28 - 33	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40
	Level	OUT (PWL)	dB(A)	46 (59)	48 (62)	55 (68)	55 (69)	
	Air Volume (IN) [Lo-Mid-Hi]		L/S	92 - 117 - 150	117 - 150 - 183	167 - 208 - 250	200 - 250 - 300	200 - 267 - 333
Starting Current			A	3.95	5.10	8.30	9.20	11.05
Indoor Unit	**Input [Rated]**		W	40	50	70		100
	Dimensions [HxWxD]		mm	200 x 790 x 700	200 x 990 x 700		200 x 1,190 x 700	
	Weight		kg	18	21	23	27	
	Static Pressure		Pa	5 - 15 - 35 - 50				
Outdoor Unit	**Dimensions [HxWxD]**		mm	550 x 800 x 285		850 x 840 x 330	880 x 840 x 330	
	Weight		kg	30	33	53	50	53
	Max. Running Current		A	8.16	9.18	16.0	14.0	16.1
	Breaker Size		A	10		20		
Ext. Piping	**Diameter (Gas/Liquid)**		mm	9.52 / 6.35		12.7 / 6.35	15.88 / 6.35	15.88 / 9.52
	Max. Length/Height		m	20 / 12		30 / 30		
Guaranteed Operating Range		Cooling	°C	-10 ~ 46		-15 ~ 43		
[Outdoor]		Heating	°C	-15 ~ 24				

* SEZ-KD VAL comes with a wireless remote controller.
Note : •Specification is subject to change without notice.
•SEZ-KD meets MEPS criteria at partial load.

MXZ-VA SERIES

For saving space...
Multiple indoor units can be connected to a single outdoor unit.

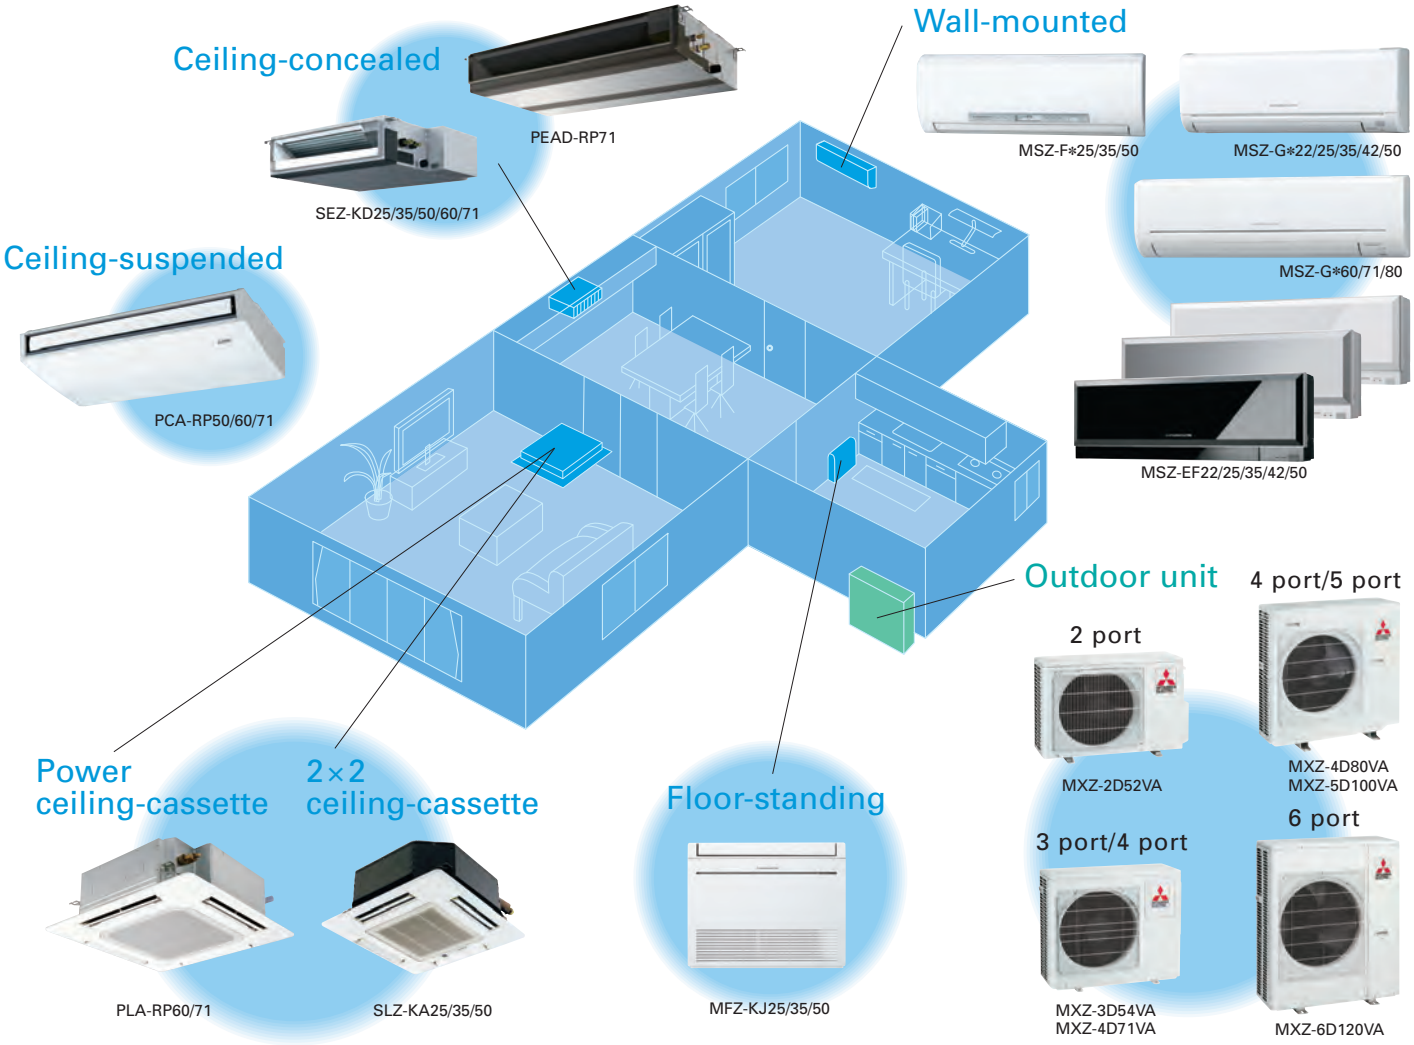

Compact Outdoor Unit Saves Space

The MXZ Series can be connected to 2, 3, 4, 5 or 6 indoor units, optimising the use of outdoor space and enhancing exterior aesthetics.
In addition the MXZ 2-port model is downsized by 30% compared with the conventional model.

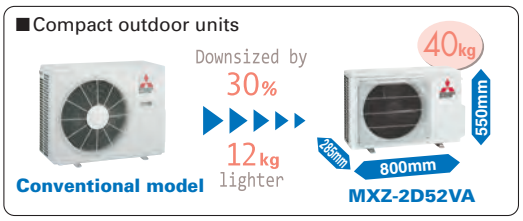

Select from a Wide Range of Stylish Indoor Units

For an attractive installation and optimum use of indoor space, choose the system that best matches your needs from 10 types including wall-mounted, floor-standing, ceiling-concealed, ceiling-cassette and ceiling-suspended units.

	Wall-mounted																Floor-standing			Ceiling-concealed						Ceiling-cassette					Ceiling-suspended		
	MSZ-F			MSZ-EF					MSZ-G								MFZ			SEZ					PEAD	SLZ			PLA		PCA		
	25	35	50	22	25	35	42	50	22	25	35	42	50	60	71	80	25	35	50	25	35	50	60	71	71	25	35	50	60	71	50	60	71
MXZ-2*52VA	●	●		●	●	●			●	●	●						●	●		●	●					●	●						
MXZ-3*54VA	●	●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●				●	●	●			●		
MXZ-4*71VA	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●			●	●	●	●		●	●	
MXZ-4*80VA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MXZ-5*100VA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MXZ-6*120VA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Energy Saving with High AEER and ACOP

Thanks to inverter technology, we have realised a higher energy efficiency ACOP of 4.03 (MXZ-4D71VA in heating) for maximum comfort.

ACOP 4.03

Quiet Operation (Silent Mode)*

With the MXZ outdoor unit, operating noise (outdoor) is just 46dB* (MXZ-4D80 in cooling mode). In combination with the MSZ-FB25VA, indoor noise can also be reduced to a quiet 20dB.

Indoor Only 20 dB | Outdoor Only 46 dB

*Quiet mode needs to be set when installed.

Advanced Remote Controller

The optional wired remote controller (PAR-31MAA*) with a weekly timer function enables eight separate pattern settings in a single day.

*Requires optional interface (MAC-333IF-E) if indoor type is wall-mounted and floor-standing.

PAR-31MAA

Fix Operation Mode

"Fix Operation Mode" can be selected to prevent operating in an erroneous mode. This is especially convenient in places where many people gather, such as in hotels.

Operable under Low Outdoor Temperatures

Even when it is as cold as -15°C outside, both heating and cooling operation are possible. Cooling may be suitable in winter for crowded spaces such as in pubs.

Longer Piping Length

To ease installation work at any site, piping is extendable up to 80 metres* in total length and 15 metres in height (additional refrigerant charge may be required).

*MXZ-5/6

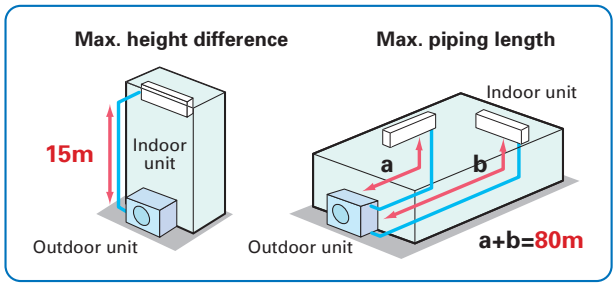

MXZ Specifications

Type				Up to 2 indoor units	Up to 3 indoor units	Up to 4 indoor units		Up to 5 indoor units	Up to 6 indoor units
Model Name				MXZ-2D52VA	MXZ-3D54VA	MXZ-4D71VA	MXZ-4D80VA	MXZ-5D100VA	MXZ-6D120VA
Power Supply [V, Phase, Hz, Source]				230V, Single, 50Hz, Outdoor unit power supply					
Cooling	**Capacity**	Rated	kW	5.2	5.4	7.1	8.0	10.0	12.0
		Min. - Max.	kW	1.1 - 6.0	2.9 - 6.8	3.7 - 8.8	3.7 - 9.2	3.9 - 11.0	3.5 - 13.5
	Power Input [Indoor + Outdoor]		kW	1.40	1.25	1.88	2.07	3.09	3.61
	AEER/EER [Indoor + Outdoor]			3.67 / 3.71	3.95 / 4.32	3.50 / 3.78	3.59 / 3.86	3.07 / 3.24	3.18 / 3.32
	Running Current [Indoor + Outdoor]		A	6.3	5.5	8.3	9.1	13.6	15.9
	Sound Pressure Level [Outdoor]	Silent - High	dB(A)	46 - 50	45 - 50	45 - 50	46 - 51	49 - 53	51 - 53
	Air Volume [Outdoor]		ℓ/s	525	648	648	910	973	987
Heating	**Capacity**	Rated	kW	6.1	7.0	8.0	8.8	10.0	13.5
		Min. - Max.	kW	1.0 - 7.0	2.6 - 9.0	3.4 - 10.7	3.4 - 11.6	4.1 - 14.0	3.5 - 16.5
	Power Input [Indoor + Outdoor]		kW	1.59	1.61	1.84	2.13	2.63	3.75
	ACOP/COP [Indoor + Outdoor]			3.80 / 3.84	4.06 / 4.35	4.03 / 4.35	3.86 / 4.13	3.58 / 3.80	3.45 / 3.60
	Running Current [Indoor + Outdoor]		A	7.1	7.1	8.1	9.4	11.6	16.5
	Sound Pressure Level [Outdoor]	Silent - High	dB(A)	49 - 53	48 - 53	48 - 54	46 - 51	49 - 59	53 - 57
	Air Volume [Outdoor]		ℓ/s	532	755	778	833	1050	1158
Number of Connectable Indoor Units		Min. - Max.		2	2 - 3	2 - 4	2 - 4	2 - 5	2 - 6
Breaker Size			A	15	25	25	25	25	32
Outdoor	**Dimensions**	Height	mm	550	710	710	915	915	1070
		Width	mm	800	840	840	900	900	900
		Depth	mm	285	330	330	320	320	320
	Weight		kg	37	57	58	69	70	87
Ext. Piping	**Diameter**	Liquid (φ)	mm	6.35 x 2	6.35 x 3	6.35 x 4	6.35 x 4	6.35 x 5	6.35 x 6
		Gas (φ)	mm	9.52 x 2	9.52 x 3	9.52x3 + 12.7x1	9.52x3+12.7x1	9.52x4+12.7x1	9.52x5+12.7x1
	Max. Length	Total - Each	m	30 - 20	50 - 25	60 - 25	70 - 25	80 - 25	80 - 25
	Max. Height		m	15 / 10*	15 / 10*	15 / 10*	15 / 10*	15 / 10*	15 / 10*
Refrigerant Chargeless Piping Length			m	20	40	40	40	40	60
Guaranteed Operating Range [Outdoor unit]		Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
		Heating	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

(NOTE) Model name shows rated cooling capacity when max. quantity of indoor units are connected.
MXZ-5D100VA: 10kW at rated connected with 5 indoor units.

Power input, running current and AEER/ACOP are the figures when connected with below indoor units.
MXZ-2D52VA → MSZ-GE35VAD×2
MXZ-3D54VA → MSZ-GE25VAD×3
MXZ-4D71VA → MSZ-GE25VAD×4
MXZ-4D80VA → MSZ-GE25VAD×4
MXZ-5D100VA → MSZ-GE25VAD×5
MXZ-6D120VA → MSZ-GE25VAD×6

*If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

(Rating Conditions)
Cooling: Indoor 27°C, D.B./19°C, W.B.
Outdoor 35°C, D.B.
Heating: Indoor 20°C, D.B./15°C, W.B.
Outdoor 7°C, D.B./6°C, W.B.

Power Multi

The Power Multi provides a quiet, highly efficient and flexible air conditioning system for all your air conditioning needs.

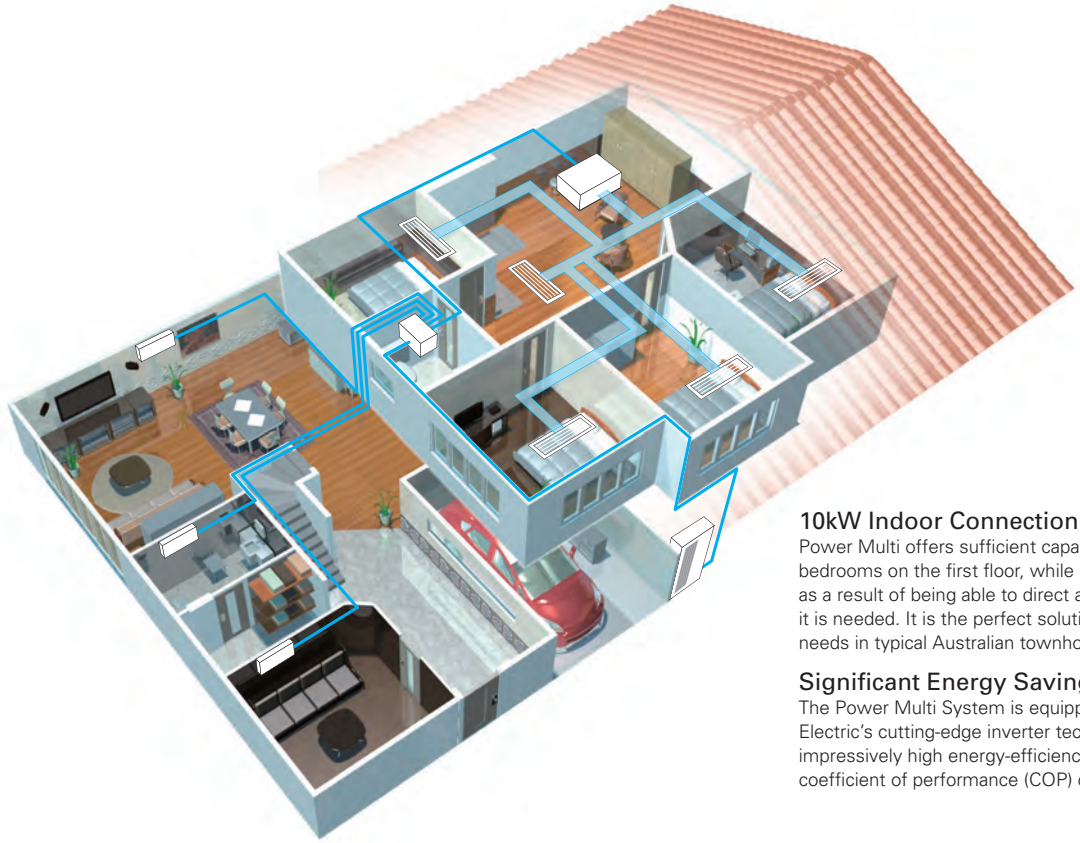

10kW Indoor Connection (Industry 1st)

Power Multi offers sufficient capacity to cool/heat the bedrooms on the first floor, while realising energy savings as a result of being able to direct air conditioning to where it is needed. It is the perfect solution for the comfort needs in typical Australian townhouses.

Significant Energy Savings

The Power Multi System is equipped with Mitsubishi Electric's cutting-edge inverter technologies, achieving an impressively high energy-efficiency ratio (EER) of 3.21 and coefficient of performance (COP) of 3.61.

Advantages of the Power Multi System

Flexible Choice of Indoor Unit

Power Multi is suitable for any need. From a versatile product line-up of 32 models in 8 types, select the best indoor units to match the application, interior and room size.

High COP

The latest technology gained in the development of our highly-reputed Power Inverter Series offers a higher coefficient of performance (COP) which is top class in the industry.

Silent Operation

Power Multi boasts smooth and quiet operation, ensuring comfort free from disturbing noise. On top of this, "Low-noise Mode" is the default setting for low operating loads, realising even quieter operation. Connection to our latest wall-mounted indoor units allows users to create a silent and comfortable space in which occupants may not even notice the air conditioning is running.

Easy Installation

Easier and safer installation thanks to a branch box that simplifies piping work and the adoption of flare connections, which eliminates the need to use direct flame.

Features of the Branch Box

Noise Kept to a Minimum

The branch box houses a linear expansion valve (LEV), which regulates the flow of refrigerant and invariably produces noise. By locating the branch box in the ceiling or outside, noise generated by the LEV can be kept clear of living spaces, thus maintaining the noise level to a minimum.



PAC-AK53BC

Brazing-free Quick Installation

All the piping leading to and from the branch box is connected using flare joints, which are easy to use and enable piping installation to be completed quickly.

Indoor Installation

The branch box can be installed in the ceiling rather than outside. Furthermore, servicing can be completed easily through access to inner components such as the circuit board by simply removing the side and bottom covers.

Outdoor Installation

Using the optional cover allows outdoor installation of the branch box, eliminating the need for a maintenance hole in the ceiling.

Up to 8 indoor units can be connected!

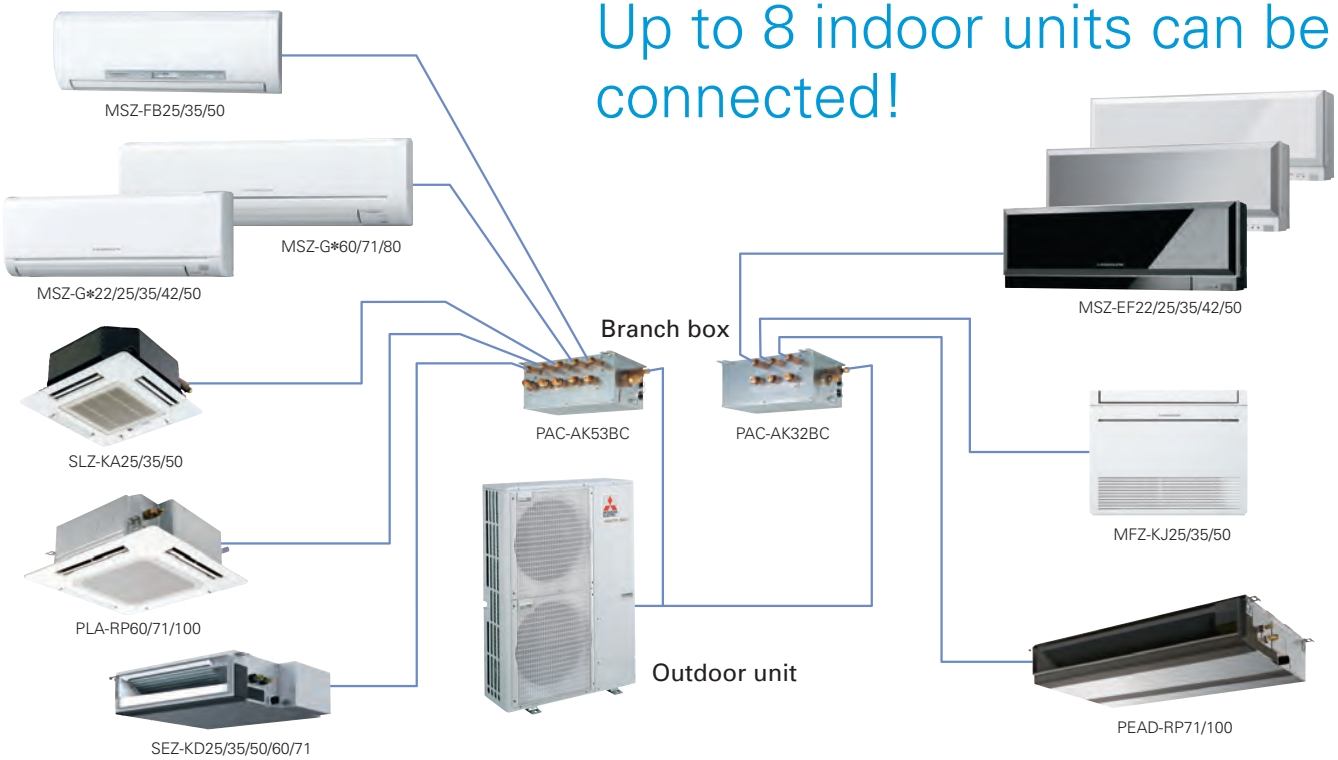

Selectable indoor models

	2.2kW	2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW	8.0kW	10.0kW
Wall-mounted – Deluxe (MSZ-F)		✓	✓		✓				
Wall-mounted – Standard (MSZ-G)	✓	✓	✓	✓	✓	✓	✓	✓	
Wall-mounted – Design (MSZ-E)	✓	✓	✓	✓	✓				
Floor-standing (MFZ)		✓	✓		✓				
Ceiling-cassette – 2 x 2 compact (SLZ)		✓	✓		✓				
Ceiling-cassette – Power cassette (PLA-RP)						✓	✓		✓*
Ceiling-concealed – Compact (SEZ)		✓	✓		✓	✓	✓		
Ceiling-concealed (PEAD-RP)							✓		✓*

* PAC-AK52YP-E is required when PLA-RP100BA and PEAD-RP100JA connect to MXZ-8B.

MXZ-8B140/160VA Specifications

Type				Up to 8 indoor units	
Model Name				**MXZ-8B140VA**	**MXZ-8B160VA**
Power Supply [V, Phase, Hz, Source]				230V, Single, 50Hz, Outdoor unit power supply	
Cooling	**Capacity**	Rated	kW	14.0	15.5
	Power Input [Outdoor]		kW	3.79	4.64
	EER[*1] [Indoor + Outdoor]			3.52	3.21
	Running Current[*1] [Outdoor]		A	16.6	20.4
	Sound Pressure Level [Outdoor]	Silent - Rated	dB(A)	47 - 50	48 - 51
	Air Volume [Outdoor]		ℓ/s	1,670	1,770
Heating	**Capacity**	Rated	kW	16.0	18.0
	Power Input [Outdoor]		kW	3.90	4.80
	COP[*1] [Indoor + Outdoor]			3.91	3.61
	Running Current[*1] [Outdoor]		A	17.1	21.1
	Sound Pressure Level [Outdoor]	Rated	dB(A)	52	54
	Air Volume [Outdoor]		ℓ/s	1,670	1,770
Number of Connectable Indoor Units		Min. - Max.		2 - 8	2 - 8
Breaker Size			A	40	40
Outdoor	**Dimensions**	Height	mm	1,350	1,350
		Width	mm	950	950
		Depth	mm	330	330
	Weight		kg	129	129
Ext. Piping	**Diameter**	Liquid (φ)	mm	9.52 x 1	9.52 x 1
		Gas (φ)	mm	15.88 x 1	15.88 x 1
	Max. Length	Total / Each	m	115 - 70	115 - 70
	Max. Height[*2]		m	30 / 20	30 / 20
Refrigerant Chargeless Piping Length			m	40	40
Guaranteed Operating Range [Outdoor]		Cooling	°C	-5 ~ +46	-5 ~ +46
		Heating	°C	-15 ~ +21	-15 ~ +21

*1 Figures represented in power input, running current and EER/COP are when connected with indoor units below.
MXZ-8B140VA → MSZ-GE22VAD × 8
MXZ-8B160VA → MSZ-GE25VAD × 8
*2 The maximum height is 20m when installing an outdoor unit positioned lower than indoor unit.

Accessories

Model Name	Description	Compatible Models
MAC-415FT-E	Anti-allergy Enzyme Filter	MSZ-GE22/25/35/50VAD, MFZ-KJ25/35/50VE
MAC-408FT-E		MSZ-GE22/25/35/50VAD
MAC-417FT		MSZ-FB25/35/50VA
MAC-2310FT-E	Electrostatic Anti-allergy Enzyme Filter	MSZ-GE60/71/80VAD
MAC-2320FT-E		MSZ-EF22/25/35/42/50VE
MAC-307FT-E	Plasma Deodorizing Filter	MSZ-FB25/35/50VA
MAC-093SS-E	Quick Clean Kit	MSZ-FB25/35/50VA, MSZ-GE22/25/35/50/60/71/80VAD
MAC-333IF-E	System Control Interface	MSZ-FB/EF/GE, MFZ-KJ, SEZ-KD, SLZ-KA
MAC-558IF-E	Wi-Fi Interface	
MAC-1001CL-E	Softdry Cloth	MSZ-EF
PAR-31MAA	Wired Remote Controller (MAC-333IF-E required)	MSZ-FB/EF/GE, MFZ-KJ
PAR-SL94B-E	Wireless Remote Controller Kit	PCA-RP50/60/71KAQ
PAC-SH88KF-E	High-efficiency Filter	PCA-RP50KAQ
PAC-SH89KF-E		PCA-RP60/71KAQ
PAC-SH83DM-E	Drain Pump	PCA-RP50KAQ
PAC-SH85DM-E		PCA-RP60KAQ
PAC-SH84DM-E		PCA-RP71KAQ
PAC-SH59KF-E	High-efficiency Filter Element	PLA-RP
PAC-SH53TM-E	Multi-functional Casement	
PAC-SH48AS-E	Space Panel	
PAC-SH51SP-E	Shutter Plate	
PAR-SA9FA-E	Wireless Remote Control Receiver Kit	
PAC-SH65OF-E	Flange for Fresh-air Intake	
PAC-SA1ME-E	i-see Sensor Corner Panel	
PAR-SL97A-E	Wireless Remote Controller	SEZ/PLA/PEAD
PAC-KE93TB-E	Filter Box	PEAD-RP71
PAC-KE94TB-E		PEAD-RP100
MAC-A454JP-E	Joint Pipe (unit ø9.52 –> pipe ø12.7)	MXZ Series
MAC-A455JP-E	Joint Pipe (unit ø12.7 –> pipe ø9.52)	
MAC-A456JP-E	Joint Pipe (unit ø12.7 –> pipe ø15.88)	
PAC-SG76RJ-E	Joint Pipe (unit ø9.52 –> pipe ø15.88)	
PAC-493PI	Joint Pipe (unit ø6.35 –> pipe ø9.52)	
PAC-SG64DP-E	Drain Pan	MXZ-8
PAC-SG61DS-E	Drain Socket	
MAC-851DS		SUZ-KA25/35
MAC-811DS		SUZ-KA50/60/71
MAC-881SG	Air Outlet Guide (to change airflow direction)	MXZ-2, MUZ-GE25/35/42/50
MAC-886SG		MUZ-EF50, MUZ-GE60/71/80
MAC-856SG		MXZ-3/4/5
MAC-857SG		MXZ-6
PAC-SG59SG-E		MXZ-8 (2 pcs. required)
MSDD-50AR-E	Distribution Pipe (to connect two branch boxes): flare connection	MXZ-8 (PAC-AK32/53BC)
MSDD-50BR-E	Distribution Pipe (to connect two branch boxes): brazing connection	
PAC-AK350CVR-E	Branch Box Outer Cover (for outdoor installation)	
DRC-101A	Interface for DRED	MUZ-GE✻✻VAD

System Control

Versatile system controls can be realized by using optional parts, relay circuits, control panels, etc.

For M Series Indoor Units (New A-control Inverter Models Only)

	System Examples	Connection Details	Control Details	Major Optional Parts Required
1 Wired Remote Control • Air conditioners can be controlled by wired remote controller equipped with Weekly Timer function.		Wired remote controller can be connected to indoor unit via interface.	With wired remote controller, operation mode/set temperature/fan speed/ vertical air direction*1 and timer settings*2 can be changed individually.	• **MAC-333IF-E** (Interface) • **PAR-31MAA** (Wired remote controller)
2 Centralized Control • Air conditioners can be group controlled with City Multi (M-NET).		M-NET connection is possible via interface.	Individual On/Off and switching Off at a specified time is possible. Operation mode/set temperature/fan speed/ air direction*1 and timer settings*2 can be changed individually.	• **MAC-333IF-E** (M-NET Interface) • Centralized controller for City Multi, such as AG150A, and power supply unit, etc.
3 Remote On/Off Operation • Air conditioner can be started/ stopped remotely. (3 and 4 can be used in combination)		Connect interface to air conditioner and set up a circuit by using the terminal inside the interface locally.	On/Off is possible from a remote location.	• **MAC-333IF-E** (Interface) • Parts for circuit such as relay box, lead wire, etc. (to be purchased locally)
4 Remote Display of Operation Status • The On/Off status of air conditioner can be confirmed remotely. (3 and 4 can be used in combination)		Connect interface to air conditioner and set up a circuit by using the terminal inside the interface locally.	The operation status (On/Off) or error signals can be monitored from a remote location.	• **MAC-333IF-E** (Interface) • Parts for circuit (to be purchased locally/ DC power source needed)
5 Interlocking with Lossnay • Lossnay can be operated simultaneously with an indoor unit.		Lossnay can be connected to an indoor unit via an interface.	Lossnay can be operated simultaneously with an indoor unit.	• **MAC-333IF-E** • Cable for Lossnay connection (to be purchased locally)

For further details, refer to the separate manual. *1 Not applicable to the models without air direction control. *2 For the timer setting, do not use the wireless and wired remote controllers together.

Conditions for Specifications

Rating Conditions (AS/NZS 3823)

Cooling	Indoor	27˚C DB, 19˚C WB
	Outdoor	35˚C DB
Heating	Indoor	20˚C DB
	Outdoor	7˚C DB, 6˚C WB

Guaranteed operating range: see specifications table.

Sound pressure level

- The sound pressure measurement is conducted in an anechoic chamber.
- The actual sound level depends on the distance from the unit and the acoustic environment.

Functions

Energy Saving

- DC Inverter
- PAM Control
- Area Setting
- Econo Cool
- "I Feel" Control
- i-see Sensor
- Potentially Demand Response Capable

Comfort

- Super Quiet : Only 19dB
- Vertical Airflow
- Auto Vane
- Swing (Vertical Vane)
- Swing (Horizontal Vane)
- Wide & Long Airflow
- Powerful Mode

Fresh Air

- Plasma Duo Filter Systems
- Fresh Air Intake
- Electrostatic Anti-allergy Enzyme Filter
- Anti-allergy Enzyme Filter
- Catechin Filter
- Nano Platinum Filter
- Anti-mold Air Cleaning Filter
- Air Cleaning Filter
- Long-life Filter
- Mold Fighter

Design

- Flat Panel
- Pure White
- Only 200mm in Height
- Suitable for 2 x 2 Ceiling (600 x 600mm)
- Compact Size

Convenience

- 24-hour Timer
- "i save" Mode
- Weekly Timer
- PAR-31MAA Control
- M-NET Connection
- Wi-Fi Interface
- Auto Change Over
- Auto Restart
- Wide Cooling Temperature Range
- Low-temperature Cooling
- Heating at -15°C is possible
- Wide Cooling Temperature Range

Installation & Maintenance

- Cleaning-free Pipe Reuse
- Failure Recall Function
- Easy Installation with an Installation Plate
- Quick Clean Body
- Easy & Simple Flare Connection
- Long-length Piping
- MXZ Connection
- Self-diagnostic Function

Anti-corrosion treatment for outdoor unit (MUZ outdoor units)

To protect the outdoor unit from rain and environmental damage, a special anti-corrosion treatment has been applied to the exterior panel. Additionally equipped with water-repellent fins that offer excellent resistance to salt and corrosion.

Warm, even heat in winter and cool comfort in summer is only a phone call or click away.

Simply contact your nearest Mitsubishi Electric Supplier today and you can find out all there is to know about how to enhance your living environment.

To locate your nearest Mitsubishi Electric Stockist go to our website

www.MitsubishiElectric.com.au

All Mitsubishi Electric Air Conditioning Systems are MEPS (Minimum Efficiency Performance Standard) Compliant, so you can be sure that they will give you the performance and efficiency that they were designed to deliver.

⚠ NOTICE

- Products in this brochure contain and operate with R410A refrigerant and synthetic oils. Please refer to the installation instructions before installation or servicing of these products.
- Under Australian law, only persons suitably licensed are permitted to install, service or repair air conditioning units.
- The buyer must ensure that the person and/or company who is to install, service or repair the air conditioner has the necessary licenses, qualifications and experience to perform the work.
- Do not install indoor units in areas (e.g., mobile phone base stations) where the emission of VOCs such as phthalate compounds and formaldehyde is known to be high, as this may result in a chemical reaction.
- When installing, relocating or servicing the air conditioners, use only the specified refrigerant (R410A) to charge the refrigerant lines. Do not mix the specified refrigerant with any other refrigerant and do not allow air to remain in the lines. If air is mixed with the refrigerant, it can be the cause of abnormally high pressure in the refrigerant lines and may result in an explosion and other hazards. The use of a refrigerant other than the one specified for the system will cause mechanical failure, system malfunction or unit breakdown. In some cases, it may also seriously reduce product safety.

Mitsubishi Electric Shizuoka Works acquired ISO9001 certification under Series 9000 of the International Standard Organization (ISO) based on a review of Quality warranties for the production of air conditioning equipment. The plant also acquired environmental management system standard ISO 14001 certification.

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

MITSUBISHI ELECTRIC AUSTRALIA PTY.LTD. (Incorporated in New South Wales) ABN 58 001 215 792

http://www.mitsubishielectric.com.au/

New South Wales:
348 Victoria Road, Rydalmere NSW 2116
Ph: (02) 9684 7555 Fax: (02) 9898 1043

Newcastle:
271 Brunker Road, Adamstown NSW 2289
Ph: (02) 4978 7813 Fax: (02) 4978 7899

Canberra:
1st Floor, 12 Albany Street, Fyshwick ACT 2609
Ph: (02) 6162 6303 Fax: (02) 6162 6300

Victoria/Tasmania:
Suite 2, 10-16 Compark Circuit
Mulgrave VIC 3170
Ph: (03) 9535 7800 Fax: (03) 9535 7801

North QLD - Townsville:
Level 1, 112 Denham Street, Townsville QLD 4810
Ph: (07) 4728 5223 Fax: (07) 4771 3310

Queensland/Northern Territory:
Building 101, 2A Boronia Road
Brisbane Airport QLD 4008
Ph: (07) 3623 2000 Fax: (07) 3860 6761

South Australia:
Suite 1, 224 Glen Osmond Road, Fullarton SA 5063
Ph: (08) 8338 1001 Fax: (08) 8338 0501

Western Australia:
Unit 5, 329 Collier Road, Bassendean WA 6054
Ph: (08) 9377 3400 Fax: (08) 9377 3499

L-179-6-C7458-F SI 1204 (NLP)

Revised publication, effective May.2014
Specifications are subject to change without notice.